

2026

PURDUE GRAND PRIX RULES





PREFACE

The rules apply to the Purdue Grand Prix Foundation's (PGPF) annual Purdue Grand Prix (PGP). Each member has been provided with or has been given access to the rules, is deemed to have full awareness and understanding of the rules and has agreed to abide by and be personally responsible for compliance with the rules.

Note: Any monetary fees, fines, etc. mentioned in the rules may be paid via cash or check to the Purdue Grand Prix Foundation through the Business Office for Student Organizations.

Further information may be obtained by contacting the Purdue Grand Prix Foundation offices at:

Purdue Union B050F
West Lafayette, IN 47907

Email- race@purduegrandprix.org



REVISIONS

PGPF reserves the right to amend and/or revise the rules at any time throughout an event (Rule 1.1.2.2.). All revisions and/or amendments to the rules shall be noted here with a date, Section number, Rule number, and brief summary of what is being revised and/or amended. Amended/revise rules are highlighted.

| Revision | Date | Section | Rule | Summary |
|----------|------------|-------------------|---------------------------------|---|
| A | 12/30/2025 | | | Initial Rules |
| B | 1/22/2026 | 9.4 2.7 9.4 | 9.4.16.6 2.7.1 9.4.29.1.2 | Remove rule about brake return spring Revised classification of rookies to include Halloween Hundred race Allows for winner of Halloween Hundred to have priority to keep their kart number |
| C | 04/01/2026 | 1.5 Appendix | 1.5.2 L | Extended Sprint Races to 25 laps Updated Post Tech form to cite WKA |



Contents

| | |
|--|----|
| 1. GENERAL..... | 5 |
| 2. ENTRANTS/DRIVERS | 12 |
| 3. ENTRIES..... | 15 |
| 4. AT TRACK PROCEDURES..... | 16 |
| 5. QUALIFICATIONS | 23 |
| 6. PENALTIES | 26 |
| 7. PROTESTS..... | 28 |
| 8. APPEALS..... | 29 |
| 9. TECHNICAL REQUIREMENTS | 31 |
| 10. SAFETY EQUIPMENT | 48 |
| 11. DRIVING PRACTICES..... | 52 |
| 12. HAND SIGNALS | 53 |
| 13. THE “HALLOWEEN HUNDRED” EXHIBITION RACE..... | 54 |



1. GENERAL

1.1. GOVERNANCE

1.1.1. General

1.1.1.1. The Rules govern the Purdue Grand Prix and supersede all previous Rules, bulletins, and supplementary Rules and regulations, unless otherwise indicated.

1.1.1.2. Each Member is personally responsible for the Member's awareness, understanding, and compliance with the Rules.

1.1.1.2.1. A Member is defined as anyone serving on a team, a member of PGPF, the Safety Committee, Media, and officers contracted by PGPF.

1.1.1.3. PGPF may penalize any Member and/or exclude any Member or equipment from any Event if PGPF or representatives of the Safety Committee deems any act, any omission, any condition to be hazardous and/or not meeting the specifications, requirements, unsportsmanlike conduct, illustrations, and/or intent of, the Rules. Acts, omissions or conditions that may warrant penalty and/or exclusion include without limitation any action which PGPF deems to be a threat to or a violation of the integrity or safety of PGPF and/or the Event.

1.1.1.3.1. Unsportsmanlike conduct includes but is not limited to acts of aggression, profanity, or insults towards members of other teams or part of/invited by the foundation.

1.1.2. Purdue Grand Prix Authority

1.1.2.1. The Rules shall be applied, constructed, and interpreted by PGPF, and PGPF's application, construction, and interpretation shall be final and binding.

1.1.2.2. Any articles relating to kart specifications, participant qualifications, and safety are written and approved as an action of the Grand Prix Safety Committee. These rules are permanent and may be amended by the Grand Prix Safety Committee only. The Safety Committee reserves the right to revise these articles at any time, including, without limitation, prior to or during an Event. Notices, bulletins, supplementary Rules, regulations, and penalties are effective on the date and time issued, regardless of the date and time when a member receives actual notice.

1.1.2.3. Additional articles relating to procedures and additional information not related to 1.1.2 may be amended by simple majority vote of the Grand Prix Senior Board.

1.1.2.4. Any violations of the University Regulations will be subject to disciplinary procedures with the Office of the Dean of Students.



1.1.3. Officiating

1.1.3.1. PGPF will select Officials, including, but not limited to, Chief Starter, Technical Inspectors, Race Officials, etc.

1.1.3.2. The Grand Prix Safety Committee is composed of:

1.1.3.2.1. President of the Purdue Grand Prix Foundation.

1.1.3.2.2. Race Director(s) of the Purdue Grand Prix Foundation.

1.1.3.2.3. Technical inspectors acceptable to the Purdue Grand Prix Foundation and Purdue University.

1.1.3.2.4. Representative from Purdue's Student Activities and Organizations Department.

1.1.3.2.5. Representative from the Environmental Health and Public Safety Department.

1.1.3.3. PGPF shall have the authority to take any actions and make any determinations it deems necessary or appropriate during, or in connection with, an Event including without limitation determinations as to whether a Rule violation has occurred, whether a penalty should be imposed, the specifications of any penalty and the enforcement of any penalty.

1.1.3.4. In order to maintain transparency of all judgements and decisions made by PGPF, PGPF shall publicly publish a notice stating that PGPF has penalized a Member and/or rendered a judgement on a review and/or appeal. The notice may include without limitation a description of the penalty or judgement and names of the affected Member(s). Having accepted the privileges and obligations of membership, the Members referenced in any such notice waive any and all rights of action against PGPF and/or against any individual or entity publishing such notice. PGPF may without limitation publicize the results referenced in such notice in the positing and awards or otherwise.

1.1.3.5. PGPF will:

1.1.3.5.1. Secure necessary timing and scoring and technical equipment, excluding transponder. See Rule 4.2.1.3.

1.1.3.5.2. Record all timing and scoring information and technical information, including the standings of an Event.

1.1.3.5.3. Control the designated timing and scoring and technical areas.

1.1.3.5.4. Provide competition information to the Competitors and the press.

1.1.3.5.5. Facilitate the awards distributions.



1.1.3.6. PGPF shall be the final authority on the content of all official postings.

1.1.4. Acceptance of the Rules

1.1.4.1. Every Member who is involved in and/or participated in any way in any Event shall be deemed to have a full awareness and understanding of and to have accepted, the Rules.

1.1.4.2. Every Member agrees to follow the direction of PGPF and Safety Committee with respect to the enforcement and interpretation of these Rules or be subjected to penalties for failure to comply with such directions.

1.1.5. Assumption of Risk, Liability Release, Medical Insurance, Acknowledgement and Indemnity

1.1.5.1. ASSUMPTION OF RISK - EVERY MEMBER AGREES TO BE BOUND BY THE RULES AND ASSUMES ALL OF THE RISK OF SUCH MEMBER'S INVOLVEMENT AND/OR PARTICIPATION IN AN EVENT.

1.1.5.2. LIABILITY RELEASE - RECOGNIZING THAT KART RACING AND ALL OF THE ACTIVITY ASSOCIATED WITH IT ("ACTIVITY") CAN BE A HAZARDOUS UNDERTAKING, MEMBERS FOR THEMSELVES, THEIR HEIRS, EXECUTORS, REPRESENTATIVES, SUCCESSORS AND ASSIGNS, AGREE, BY THEIR MEMBERSHIP, THAT THEY RELEASE AND DISCHARGE PGPF, PURDUE UNIVERSITY, THE TRUSTEES OF PURDUE UNIVERSITY, AND ANY OF ITS OR THEIR DEPARTMENTS, TRUSTEES, AFFILIATED, EMPLOYEES, OFFICERS, AGENTS, AND INSURERS ("THE RELEASED PARTIES") FROM ANY AND ALL LIABILITY FOR DAMAGES TO PROPERTY, PERSONAL INJURY, AND/OR DEATH, IN ANY WAY RELATING TO ANY EVENT OR THE MEMBERS' INVOLVEMENT AND/OR PARTICIPATION IN THE ACTIVITY, REGARDLESS OF HOW THE INJURY OR EVENT MIGHT ARISE INCLUDING WITHOUT LIMITATION RACE OFFICATING, RULE INTERPRETATION AND VIOLATIONS, PHYSICAL CONDITION OF THE TRACK, AND/OR EMERGENCY TREATMENT OR RESCUE.

1.1.5.3. ACKNOWLEDGEMENT

1.1.5.3.1. MEMBERS RECOGNIZE THIS RELEASE APPLIES REGARDLESS OF WHETHER OR NOT INJURY OR EVENT MIGHT BE CAUSED IN WHOLE OR IN PART BY THE NEGLIGENCE OR OTHER FAULT OF THE RELEASED PARTIES. MEMBERS MAY BE ASKED TO ACKNOWLEDGE THIS ASSUMPTION OF RISK AND RELEASE BY OTHER AGREEMENTS THEY MIGHT SIGN AS A PREREQUISITE TO PARTICIPATE IN THE ACTIVITY.



1.1.5.4. **INDEMNITY** - EACH MEMBER ACKNOWLEDGES THAT MEMBER IS RESPONSIBLE FOR VIOLATION OF MEMBER'S AGREEMENTS BY MEMBER, MEMBERS'S REPRESENTATIVES INCLUDING LOVED ONES AFFECTED BY MEMBER'S INVOLVEMENT AND/OR PARTICIPATION, AND MEMBER'S PARTICIPANTS AND GUESTS. THIS RESPONSIBILITY APPLIES TO ALL VIOLATIONS OF MEMBER'S AGREEMENTS WITH PGPF. THIS INCLUDES THE MISUSE OF CREDENTIALS AND THE FAILURE TO ACCEPT THE ASSUMPTION OF RISK, THE WAIVER AND RELEASE OF LIABILITY, THE BINDING NATURE OF THE RULES, PGPF'S INTERPRETATION OF THE RULES, AND THE FINALITY OF THE APPEAL PROCEDURE. MEMBER UNDERSTANDS THAT THIS RESPONSIBILITY INCLUDES THE DUTY TO INDEMNIFY AND HOLD THE RELEASED PARTIES HARMLESS FROM AND AGAINST ANY AND ALL LOSSES, LIABILITIES, DAMAGES, COSTS OR EXPENSES (INCLUDING BUT NOT LIMITED TO REASONABLE ATTORNEYS' FEES AND OTHER LITIGATION COSTS AND EXPENSES) INCURRED BY ANY OF THE RELEASED PARTIES AS A RESULT OF ANY CLAIMS OR SUITS THAT I (OR ANYONE CLAIMING BY, UNDER OR THROUGH ME) MAY BRING AGAINST ANY OF THE RELEASED PARTIES TO RECOVER ANY LOSSES, LIABILITIES, COSTS, DAMAGES, OR EXPENSES THAT ARISE DURING OR RESULTING FROM MY PARTICIPATION IN THE ACTIVITY, REGARDLESS OF WHETHER OR NOT CAUSED IN WHOLE OR PART BY THE NEGLIGENCE OR OTHER FAULT OF ANY OF THE RELEASED PARTIES.

1.2. SAFETY

1.2.1. **Safety Policy** - While PGPF seeks to maintain safe conditions for Competitors and others taking into account all aspects of the Event, Members recognize that conditions may not be safe and can be affected by human error. At any Event, each Member acknowledges and agrees that racing is a hazardous activity and each Member's involvement and/or participation is with expressed assumption of this risk.

1.2.1.1. While acknowledging the inherent risk of racing to Competitors and other Members involved and/or participating in an Event, Members are personally responsible for their own safety, for the safety of each Member of Member Group and for the safety of their racing equipment.

1.2.1.2. PGPF may take any action including canceling, postponing, temporarily stopping or delaying an Event, if PGPF determines that basic safety requires such action. PGPF may order off the Track any Member or Kart that PGPF determines constitutes a hazard. PGPF may prohibit any Member or Member's equipment from entering or continuing in an Event.



1.2.2. Security

- 1.2.2.1. Only authorized individuals are permitted on the Track and in other restricted locations designated by PGPF.
- 1.2.2.2. Pit passes in the form of a picture I.D. badge will be issued to the Members upon passing technical inspection. All Members must have pit passes and their Purdue I.D. readily available to any Official via physical card or digital I.D.
- 1.2.2.3. Lost pit passes will require a \$15 replacement fee.
- 1.2.2.4. Misuse of I.D. badges by Members may lead to removal from the track and disqualification of the team from events at the discretion of the Race Director(s) and Internal VP.
- 1.2.2.5. Misuse of I.D. badges by non-Members will lead to an automatic disqualification for that team for the year. Any badge being misused will be immediately destroyed.
- 1.2.2.6. If any person in the pits is not an official member of a crew and that crew is aware of their presence, that kart and crew will be disqualified from further participation in Events for that year. The Race Director(s), Pit Coordinator, and Safety Committee shall have complete discretion.
- 1.2.2.7. PGPF and any contracted service staff at the Track have the right to have the proper authority to engage in such searches of individuals as they deem necessary or appropriate for the safety and security of the Event. If they deem necessary, PGPF has the right but are not required to have the proper authority remove any individual and/or property from the Track.
- 1.2.2.8. The use of drones or any other unmanned aircraft systems ("UAS") is prohibited unless approved in advance in writing by PGPF and is in compliance with the University policy as well as Federal and local policy and law. The use of drones must also be approved by PUPD and the airport.

1.2.3. Driver Self Extrication Requirement

- 1.2.3.1. Drivers are required to demonstrate the ability to exit the Kart within seven seconds to PGPF's satisfaction by a method as determined by PGPF.

1.2.4. Data Sharing Policy - All Members agree:

- 1.2.4.1. PGPF owns any and all rights to exploit the Event including without limitation, all photographic, video, audio, films, still and/or motion picture images, sounds and data or other reproductions thereof.



1.2.4.2. PGPF may disclose the data to third parties for any purpose including, without limitation, safety and/or medical research.

1.3. ADVERTISING

1.3.1. PGPF may regulate or deny the advertising of any product on equipment, apparel or otherwise in connection with a Member or Event.

1.3.2. PGPF may disapprove advertising for any reason, including, without limitation, advertising which it determines offensive, inappropriate, illegal, undignified, in conflict with any PGPF sponsorship, in conflict with University regulations, potentially confusing or may detract from the interest in any Event and/or the integrity of PGPF and the University.

1.3.3. PGPF may require a Member to agree in writing with a policy statement regarding advertising of a particular product.

1.3.4. Advertising sponsors on the karts themselves shall be limited to signs located on front, rear, and side bumpers of the kart. The advertising in the front shall be at least 4 inches from each side of the front number panel.

1.3.5. An 18" x 36" professionally made sign may also be displayed on the half fence running along pit lane, determined by the Director of Marketing and Communications and/or Sales. A signed Supporter Agreement with PGPF along with a \$150 fee will be required to display the advertising. There will not be approvals granted on race day.

1.4. **ACTIVITIES** – PGPF may schedule mandatory meetings and/or activities for Members. PGPF may require a meeting with Member(s) at any time. Each Member must attend and actively participate in all official meetings and other activities designated by PGPF as mandatory for that Member at the times and locations designated by PGPF. These may include, but are not limited to the following:

1.4.1. **Competition**

1.4.1.1. **Competition Meetings** - PGPF may conduct one or more meetings of Drivers, Crew Chiefs, and Track Workers to discuss general application, construction and interpretation of the Rules.

1.4.1.2. **Driver Meetings** - Attendance at such Driver meetings may be limited to only the Driver participating in the Event. Additional attendees and alternate drivers may also be invited to attend.

1.4.1.3. **Track Worker Meetings** - In addition to attending any mandatory meetings, track workers may be required to demonstrate knowledge of the rules and on track



procedures through such means including, but not limited to, quizzes and hands on knowledge tests.

1.4.2. Media

1.4.2.1. Pre-Race Activities

1.4.2.1.1. **Qualifications** - Drivers must attend the Pole winner photograph obligations.

1.4.2.1.2. **Pre-Race Ceremonies** - In preparation for the Race, Drivers shall follow the instructions of PGPF. Unless otherwise directed, the Drivers shall proceed to the Pre-Race stage and fully participate in Pre-Race ceremonies including without limitation any Driver introductions and/or Track laps.

1.4.2.2. **Post-Race Activities** - Upon completion of the Race, all Competitors shall follow the instructions of PGPF.

1.4.2.2.1. The winning Driver must attend and participate in post-Race interviews in victory lane. The winning Driver and Team agree to permit the display of the Kart in victory lane, as designated by PGPF, along with any sponsor(s) items as determined by PGPF. The winning Driver and Team agrees to participate in a photograph session with sponsor(s) and guests as determined by PGPF.

1.5. RACE DURATION

1.5.1. The scheduled number of laps for the main event is 160 laps.

1.5.2. The scheduled number of laps for the sprint races is 25 laps.



2. ENTRANTS/DRIVERS

2.1. ELIGIBILITY

- 2.1.1. A kart may be entered only by an officially recognized University organization, a group of students, or housing units in good standing with Purdue University.
- 2.1.2. All undergraduate crew members on a team shall be enrolled in Purdue University, or a Purdue affiliated university carrying a minimum of twelve credit hours offered by Purdue University.
- 2.1.3. All graduate crew members on a team shall be enrolled in Purdue University carrying a minimum of nine credit hours offered by Purdue University or a Purdue affiliated university.
- 2.1.4. Students in the cooperative education program are eligible to participate.
- 2.1.5. Crews must be composed of students attending the campus from which the kart is entered.
- 2.1.6. Any Driver wishing to compete in the main event must have participated in a minimum of four practice sessions. Participation counts as completing one full lap under the kart's own power recorded by the scoring system. The minimum number of practice sessions is subject to change at the Directors of Race discretion due to inclement weather or other uncontrollable factors.
- 2.1.7. No member of the Grand Prix Foundation Senior Board, Junior Board, Safety Committee, Grand Prix Queen Program, or scholarship applicant and/or recipient shall be permitted to be a member of any kart crew.
- 2.1.8. **Duration of Eligibility**
 - 2.1.8.1. Students may participate in the Grand Prix Race a maximum of five consecutive years from the first date of participation.
 - 2.1.8.2. Participation is defined as being a registered member of a crew as a driver, crew chief, or crew member at any time after the first practice has started, whether k Hundred or Main Event.
- 2.1.9. A team will not be allowed to participate in an event if there are no eligible track workers available from the team.
- 2.1.10. Operating a combustion-driven race kart on the PGP track outside of PGPF-sanctioned events during the Spring semester will result in disqualification from the race unless approved by the PGPF.

2.2. CREW SIZE

- 2.2.1. The maximum number of members for a single team is seven.



2.2.2. Driver, crew chief, relief drivers, track workers, and any other general crew members are considered members of a team.

2.2.3. The minimum number of members for a single team is three. Including a driver, crew chief, and track worker.

2.2.4. No person may be a member of more than one crew.

2.3. CREW CHIEF

2.3.1. Each Entry must have a crew chief.

2.3.2. The crew chief is responsible for the kart complying with the Rules.

2.3.3. The crew chief shall serve as the official spokesperson of the crew's communication.

2.3.4. The crew chief must be in the kart's assigned Pit Box when the kart is on the Track and must accompany the kart during all technical inspection processes.

2.3.5. A crew chief cannot also be a relief driver.

2.3.6. No one other than the crew chief shall handle a situation with the Race Officials or the Race Director(s).

2.4. TRACK WORKER

2.4.1. Any team member expecting to function as a track worker must attend all required meetings for track workers. PGPF may also require additional training or meetings including, but not limited to, fire safety meetings, skills demonstrations, and knowledge quizzes.

2.4.2. Track workers are required to go straight out on the track as soon as the team has arrived inside the track or when instructed to by an official or Race Director.

2.4.3. Track workers are not allowed to leave the track until all karts are stationary in the pit lane and the Race Official at their corner have instructed them to leave.

2.4.4. Best practices for track workers can be found in supplemental publications from PGPF (See Appendix N).

2.4.5. Any crew member caught using an electronic device in the track may be immediately removed from the event and disqualified from future events. This may result in a Black Flag for their respective kart and disqualification for that day as well as the next running day. No warnings will be given for this offense and will result in a \$50 fine at the discretion of PGPF.

2.4.6. Track workers are required to wear a brightly colored safety vest with their team number clearly displayed on the back. Safety vests may be rented from PGPF for a \$10 fee. This is a one-day rental; teams are required to have their own safety vest. Vests rented from the PGPF must be returned on the same day that they are rented.



2.5. RELIEF DRIVERS

- 2.5.1. A crew member may act as a relief driver if they meet all requirements of eligibility of a driver. Team size requirements must still be maintained.
- 2.5.2. Relief drivers must attend technical inspections and demonstrate fit and escape requirements same as primary driver.
- 2.5.3. The Crew Chief must inform a member of scoring when a driver change is made during practices. If a member of scoring is not informed, practice attendance and times may be deleted, or any other penalty at the PGPF discretion.
- 2.5.4. If a relief driver is changed to be the primary driver, the Race Director(s) must be notified prior to the change occurring.

2.6. CREW CHANGES

- 2.6.1. Crew chief must send written notification to the Race Director(s) of any requested crew member changes after initial registration.
- 2.6.2. No changes may be made after the second technical inspection except in extreme cases as determined by the Race Director(s).

2.7. ROOKIE DRIVERS

- 2.7.1. Any driver or relief driver who has not participated in a previous Purdue Grand Prix main feature as a driver is considered a Rookie Driver. A Purdue Grand Prix main feature includes qualifications, sprint races, the Purdue Grand Prix, and the Halloween Hundred Race.
- 2.7.2. Before participating in any on track activities Rookie Drivers will be required to attend a rookie orientation program as determined by the Race Director(s). These may include, but are not limited to, on track rookie practice and driver orientations.
- 2.7.3. Failure to attend required events will prohibit the driver from participating in any on track activities. If a driver cannot attend these events, then they must notify the Race Director(s) prior to the scheduled events. It is at the discretion of the Race Director(s) and Internal VP to deem the reasoning as acceptable and take appropriate action.



3. ENTRIES

3.1. GENERAL

- 3.1.1. The form to complete registration can be found at purduegrandprix.org.
- 3.1.2. Registration opens December 1, 2025.
- 3.1.3. An application will not be complete until all required forms detailed in Section 3.2. and all fees detailed in Section 3.3 have been submitted.

3.2. REQUIRED FORMS

- 3.2.1. In addition to filling out the online entry form, each participant must sign the following forms and submit to the Purdue Grand Prix Foundation office, Purdue Union B050F.
 - 3.2.1.1. Waiver, Release, Hold Harmless, and Medical Insurance Form.
- 3.2.2. Forms may be found under the team information page on the Grand Prix website.

3.3. FEES

- 3.3.1. Registration fee for each kart is \$450, a \$50 discount will be applied if completed before the specified early registration time. No registrations will be accepted after the ending of the registration time.
 - 3.3.1.1. Registration discount ends on January 30th, 2026.
- 3.3.2. Registrations may be paid in cash, check, BOSO transfer, or online through TooCOOL.

3.4. DEADLINE

- 3.4.1. Unless otherwise specified, the deadline for all entries and team member changes is February 20, 2026, at 5 pm EST.
- 3.4.2. PGPF may refuse to accept late entries. Late entries, if accepted, may be penalized by PGPF.

3.5. REFUNDS

- 3.5.1. No refunds of any kind shall be given, except in the case of the cancellation of the race and the race is not rescheduled. In the event of cancellation with no reschedule, team's paid registration fee may be rolled over to the next year.



4. AT TRACK PROCEDURES

4.1. ON TRACK CONDITIONS AND FLAGGING USES

4.1.1. **Green Condition** - The Green Condition signifies racing conditions are clear to start.

4.1.1.1. **Practice** - A practice session has begun.

4.1.1.2. **Qualifications** - Qualification heat has begun.

4.1.1.3. **Race** - Unless otherwise instructed, a Race has begun.

4.1.2. **Yellow Condition** - The Yellow Condition signifies caution. This could indicate a partial blockage of the track or other unique circumstance that drivers should be on the lookout for.

4.1.2.1. Overtaking is not permitted between the first Yellow Condition and the subsequent Green Condition.

4.1.2.2. Drivers shall reduce speed immediately, proceed with caution, maintain position, and yield to safety personnel.

4.1.2.3. **Local Yellow**

4.1.2.3.1. At the display of a local yellow a driver must slow down, raise one hand, hold their position, and be prepared to stop.

4.1.2.3.2. Drivers must remain at a controllable speed until the first flag station that is not displaying a yellow flag. A controllable speed allows for rapid control of the kart.

4.1.2.4. **Full Course Yellow**

4.1.2.4.1. During a full course yellow, a driver must slow down, raise one hand to signal to the bridge, hold their position, and be prepared to stop.

4.1.2.4.2. Drivers must remain at a controllable speed until the track has entered the green condition or the full course yellow has been reduced to a local yellow. A controllable speed allows for rapid control of the kart.

4.1.2.5. A kart may pass another kart only if:

4.1.2.5.1. Both karts are in pit lane boundaries.

4.1.2.5.2. The other kart is stopped on the track.

4.1.2.5.3. PGPF or starter indicates to pass a kart.

4.1.2.6. A kart must not use pit lane to improve its position relative to any kart remaining on the racing surface, but a kart may improve its position relative to other karts in pit lane.

4.1.2.7. PGPF may impose black flag penalties for violation of any rules outlined above in Section 4.1.2. Yellow Condition.

4.1.2.8. PGPF has the right to assess a time penalty to remain in the pits.

4.1.3. **Red Condition** - The red condition signifies the suspension of on-track activities.



4.1.3.1. A red flag given to the entire field means that the track is hazardous for racing or the safety of personnel at the track is at risk due to karts operating on the track. All karts must pull off into the infield as safely and quickly as possible and kill the engine.

4.1.3.1.1. A red flag shall be thrown in the event of a kart tipping on its side or top, and the driver of the kart is required to be evaluated by medical personnel. The driver will only be able to return to racing after being cleared by the medical personnel.

4.1.3.1.2. In the event medical personnel are called to tend to a crew member, the red condition will be enforced from the time of calling until the medical personnel are cleared from inside the gate of the track.

4.1.3.1.3. The Foundation or Safety Officials may require a driver to be evaluated by medical personnel after an accident that may not include a kart tipping on its side or top.

4.1.3.2. No work may be performed on any kart whether on the track or in the pit lane while under the Red Condition during a main feature event.

4.1.3.3. As soon as instructed by the Race Director or Pit Coordinator, two crew members are allowed to attend to the kart and driver. They must bring only their kart stand, fire extinguisher, and starter motor.

4.1.3.4. If the race is to be restarted, the Race Director and Scoring and Timing Officials will position karts at the start/finish line in order of the last complete lap.

4.1.3.5. Unless otherwise declared by PGPF, a Race stopped by the declaration of a Red Condition due to inclement weather will be considered incomplete unless more than 50% of the scheduled number of laps has been completed by the race leader.

4.1.3.6. If a Red Condition is declared due to inclement weather and more than 25% and less than 50% of the schedule number of laps has been completed by the race leader the race will be restarted at a later time or on the scheduled rain date by lining up the karts in single file in the order of the last completed lap. If a Red Condition is declared due to inclement weather and less than 25% of the scheduled number of laps has been completed by the race leader the race will be restarted according to the race starting order.

4.1.4. The decision as to whether to declare a Green, Yellow, or Red Condition may not be reviewed and/or appealed.

4.1.5. **Black** - The driver shall proceed to his/her Pit Box on the next lap and follow the instructions of a race official.



4.1.6. **Rolled Black** - The rolled black flag will be given to any competitor whose driving conduct is bordering on penalization. This is only a warning and does not require the kart to leave the track.

4.1.7. **Blue** - The blue flag with or without the diagonal yellow stripe will be given to any kart which does not yield to an overtaking kart. The flagged kart must, within one lap, hold their line and signal the faster kart to pass. The flagged kart must indicate which side to pass on.

4.1.8. **White**

4.1.8.1. **Practice** - Indicates 5 minutes remaining in practice.

4.1.8.2. **Qualifications** - Indicates 1 minute remaining in heat.

4.1.8.3. **Race** - The leader has commenced his/her last lap and will continue to be displayed to all successive karts as they cross the start/finish line.

4.1.9. **Checkered** - The practice session, qualifying session, or race is completed. The winner should proceed on his/her parade lap while all other drivers must enter pit lane. The top five karts may stay in the infield for post-race ceremonies.

4.2. **TIMING AND SCORING**

4.2.1. **Systems**

4.2.1.1. The electronic system is the primary record.

4.2.1.2. PGPF may also consult with other Officials, review camera footage, and consider such other data as necessary or appropriate to decide the order of the karts.

4.2.1.3. All karts must be equipped with a scoring transponder provided by the team.

Required equipment includes: MyLaps transponder (either X2 or TR2) with an active subscription and mounting bracket.

4.2.1.4. Maintenance of the transponder is the responsibility of the furnishing team.

4.2.1.5. Transponders may be borrowed from the Grand Prix Foundation for one event at a time on a first come, first serve basis. If a borrowed transponder is not returned by the end of the event, a \$50 late return fee will be charged to the team. If a borrowed transponder is not returned by the end of the race, the team will be charged an additional replacement fee at the cost of a new transponder.

4.2.1.6. Transponders should be mounted behind the driver's seat, within six (6) inches of the track surface.

4.2.2. **Start/Finish Line** - The scoring of karts shall begin at the moment when:



4.2.2.1. **Race** - the timing transponder of the lead kart reaches the starting line after the prescribed number of parade and pace laps have been completed and the green flag has been displayed by the starter.

4.2.2.2. **Practice/Qualifications** - the declaration of the Green or Yellow Condition has been given by PGPF.

4.2.3. **Lap Credit**

4.2.3.1. A kart is credited with a lap when its transponder crosses the Start/Finish Line after completing one entire lap of the Track.

4.2.3.2. A kart is the first kart out of the Race and is awarded the final position based on the following order:

4.2.3.2.1. The kart is listed in the official Qualifications posting, but it is not in position in the Starting Lineup on the Grid and does not start a Race.

4.2.3.2.2. The kart is in position in the Starting Lineup on the Grid, but it does not start the Race.

4.2.3.2.3. The kart drops out during the parade or pace laps.

OR

4.2.3.2.4. The kart drops out of a Race before completion of the first lap.

4.2.3.2.5. In the event that more than one kart is affected in one or more of the above categories, such karts will be ranked based on their positions in the original Starting Lineup.

4.2.3.3. Once the competition review (time period to allow for protests, see Rule 7.3) and post-race technical inspection is completed, PGPF will post official results.

4.2.3.4. Karts not completing the scheduled number of laps will be ranked in order by total laps completed and sequence of completion, whether the kart is still running or not.

4.2.4. **Ties**

4.2.4.1. In the event that PGPF is unable to conclusively determine any difference in the physical sequence for two or more karts at the end of a Race, PGPF shall determine the finishing positions based upon the karts' positions at the start/finish line on the prior lap.

4.2.4.2. In the event two or more karts post the identical number of laps led in a Race, the kart finishing the Race in the higher/highest position will earn the award for most laps led.

4.2.5. **Shortcuts** - A kart may not improve its position with all 4 wheels off the racing surface unless there is a dangerous condition present.



4.3. RACE START

- 4.3.1. Once a kart enters the pits on race day it may not leave the track entrance gates unless instructed by the race director(s) or safety officials. If not instructed, doing so disqualifies the kart.
- 4.3.2. All karts will be lined up in pairs in the pits in their order of qualifications. When all karts are in order the crews will push them out to the track to the start/finish line.
- 4.3.3. The pole position kart will start from the inside of the front row. Each kart must be in position in the Starting Lineup during the parade and pace laps until declaration of the Green Condition.
- 4.3.4. If a kart is not in position prior to the beginning of the pace lap, the kart must start from pit lane.
- 4.3.5. If a kart fails to start in 15 seconds it must immediately return to the pits. The crew may attempt to restart the kart and the driver may rejoin the field at the rear of the starting lineup.
- 4.3.6. If a kart directly in front of you falls out of line, wait until the starter signals you to move up into their position. All karts starting on the inside remain on the inside and all karts starting on the outside remain on the outside.

4.4. MECHANICAL CONDITIONS

- 4.4.1. The Race Officials and Technical Inspectors shall determine whether a kart involved in a crash or with a hazardous mechanical condition will be permitted to continue in the event or must first return to the pit lane for necessary repairs.
- 4.4.2. Parts damaged during the race may only be replaced by an exact matching part or assembly.
- 4.4.3. After any repairs have been completed, the kart is subject to visual or other inspection by PGPF prior to and/or during any further competition.

4.5. PIT PROCEDURES

4.5.1. Pit Spot Assignments

- 4.5.1.1. Pit spots are available on a first come, first serve basis for all events except for the main race.
- 4.5.1.2. The first 27 qualifying karts will be assigned pit spots prior to race day by order of qualification time.
- 4.5.1.3. The remaining 6 qualifying karts will be assigned pit spots on race day by order of sprint race placement (see appendix O).



4.5.2. A kart must only use its specified pit box on race day unless otherwise approved.

4.5.3. Pit Speed

4.5.3.1. Drivers may not exceed 15mph in the pit lane during the race and 10mph during all other events, including practices.

4.5.3.2. Drivers in violation of 4.5.3.1. shall incur a minimum of a 10 second penalty per offense added to their finishing time.

4.5.3.3. Drivers must reduce to pit speed prior to crossing the pit entry line and may only exceed pit speed after crossing the pit exit line.

4.5.3.4. Pit entrance and exit lines are indicated by a painted white line across the entirety of pit lane.

4.5.4. All karts must stay in the driving lane except when entering or exiting their own pit. The exiting driver must yield to a moving kart.

4.5.5. Pit Stops

4.5.5.1. All karts must make a pit stop during the course of the main race. During the mandatory pit stop, each kart must come to a complete stop in their designated pit area and exchange their fuel tank. If a team does not have a second tank, they may lift their fuel tank completely out of the firewall and then place the fuel tank securely back into the firewall. This stop will be monitored by a PGPF member and will result in a black flag if not followed properly.

4.5.5.2. A pit stop may count towards the requirement only after a kart has crossed the start/finish line on track under the racing condition.

4.5.6. Tank Exchange

4.5.6.1. A fire extinguisher must be readily accessible throughout the duration of the fuel tank exchange.

4.5.6.2. Quick-fill systems, including commercially manufactured dry break systems, are not allowed.

4.5.7. Random Inspections

4.5.7.1. All equipment and karts must be readily available for inspection at all times. All equipment/parts must be taken into the pits through the main gates. Failure to do so will result in disqualification for the remainder of the day's activities and the next running day, at the discretion of the Race Director(s) and Internal VP.



- 4.5.7.2. Failure of a random inspection will result in deletion of qualified lap times from the entire session and any other penalties determined by the Race Director(s) and Internal VP.
- 4.5.7.3. If a team fails a random inspection, the practice attendance will count, unless determined otherwise by the Race Director and Internal VP.
- 4.5.8. Chairs are not allowed in the pits.
- 4.5.9. All karts, equipment, and crew members must fit in the team's designated pit box. Pit lane must be clear at all times.
- 4.5.10. Crew chiefs are the only member of the team who is allowed to leave their designated pit box. All other members are required to stay in the pit box at all times unless retrieving a disabled kart.
 - 4.5.10.1. Members retrieving a kart are not permitted to enter the track area. A disabled kart will be brought to the end of the pits for retrieval by the members in the pits.
- 4.5.11. Only beverages in spill-proof plastic bottles are allowed in the pits. No disposable cups or glass.
- 4.5.12. No food or snacks in the pits or on the track. All food must be eaten outside the track facility.
- 4.5.13. No power tools requiring the use of an outlet will be permitted in the pit area. Battery operated tools are permitted. Battery operated tire inflators are permitted to be used inside the track. All batteries must be charged outside the gate, battery chargers will not be allowed in the pits.



5. QUALIFICATIONS

5.1. MEETINGS

5.1.1. PGPF may hold a specific meeting prior to the start of any Qualifications. PGPF may designate the meetings as mandatory for some Members.

5.2. GENERAL

5.2.1. PGPF may penalize any member delaying or attempting to delay Qualifications.

5.2.2. Once lineup for the first Qualification heat begins on Qualification Day, the kart may not leave the track entrance gate unless instructed by the race director(s) or safety officials. If not instructed, doing so disqualifies the kart.

5.2.3. The top five karts shall be held in impound until the end of the day. A maximum of two crew members and a minimum of one crew member must be with the kart at all times in impound.

5.2.3.1. Karts not in the top five must stay in the pits for the remainder of the Event with fire extinguisher, starter, and minimum one member of the team. Teams placing 6th & 7th place will also remain in the pits with a PGPF representative.

5.3. QUALIFICATION ORDER

5.3.1. Qualification heat order will be determined by karts being placed in groups of ten (10) based on fastest lap time set in practice. Within those groups of ten (10), groups of five (5) will be randomly generated to form the qualifying heats. Qualifying heats will go in order of generation.

5.4. WARM-UP PRACTICES

5.4.1. There shall be one half hour practice on Qualification Day for karts to warm up.

5.4.2. Odd numbered karts will be allowed to warm-up during the first 15-minute period and even numbered karts will be allowed to warm-up during the second 15-minute period.

5.4.3. When warm-up is complete, all karts will proceed to the pits to await further instructions.

5.5. DRIVERS

5.5.1. One individual registered team driver or a back-up driver can qualify only the kart registered to the team, provided the driver has met all necessary requirements.

5.5.2. If, for some unforeseen reason, the qualifying driver is unable to drive the kart on Race Day, the Race Director(s) must be notified in writing and shall decide if the reason is



acceptable. If acceptable, the kart will start with the new driver and be placed at the back of the starting field.

5.6. QUALIFYING PROCEDURE

- 5.6.1. All teams must remain in the pits until instructed by race officials.
- 5.6.2. Each qualification heat will be lined up in the area indicated by race officials.
- 5.6.3. A race official will instruct each kart to start their engine one at a time and give the signal to proceed onto the track. If a kart does not start within 5 seconds, the remaining teams in the qualifying session will be released. Once all karts have been released, the kart that did not start will have the opportunity to proceed onto the track.
- 5.6.4. A qualification heat will last 5 minutes.
- 5.6.5. The time of the last initiated lap before the five minutes is up will be the time of the last lap scored.
- 5.6.6. Drivers may use the pit during their heat.

5.7. DELAYS/POSTPONEMENT

- 5.7.1. In the event that not all teams can qualify on qualifications day the entire field will requalify on the rain date.
- 5.7.2. In the event that qualifications are not able to be held, starting positions in the main race and sprint races shall be set using practice results. The fastest complete lap time from a practice session will serve as qualification time for each kart.

5.8. NUMBER OF ATTEMPTS

- 5.8.1. Each team will be allowed one 5-minute session for qualification.

5.9. OFFICIAL QUALIFYING TIME

- 5.9.1. The official qualifying time is the fastest single lap time that the driver posts during his/her qualifying session. In the case of two karts qualifying with the same time, the kart which posts that time first will be placed ahead of the other kart.

5.10. QUALIFYING POSITIONS

- 5.10.1. After all teams have had the chance to qualify, the fastest kart and driver will be awarded the pole position.
- 5.10.2. The next fastest twenty-six (26) teams will be in the main event in the order of their time.
- 5.10.3. Any team/kart not making the top 27 positions after qualifying will be split up into three sprint races to take place before the main event on race day. The top two finishers from each sprint race will be added to the end of the starting lineup for the main event.
 - 5.10.3.1. Sprint race lineups will be determined by qualification position. See Appendix M.



5.10.3.2. To qualify for the sprint races, each team must either attempt a lap during their qualifying session or notify a Race Director if they are unable to do so. The Race Director and Internal VP may then waive their qualifying attempt.

5.10.3.2.1. An attempt is defined as an intact kart with a driver lining up at the start line for its designated qualification heat and attempting to start the engine.

5.10.3.2.2. Any kart that makes a successful attempt yet fails a lap will be placed at the back of the sprint races. If more than three karts fail to complete a lap, yet make an attempt, placements will be determined by practice lap times.

5.11. QUALIFICATION EXAMINATION

5.11.1. All karts must submit to an examination of the fuel used during any qualification attempt. Failure will result in nullification of qualification time.

5.11.2. Teams must demonstrate that the kill switch of the kart is in working condition when they return to their pit box at the conclusion of their qualification attempt. Teams who fail the kill switch inspection will have their qualification times negated. Any kart that fails the kill switch inspection will be required to demonstrate the operation of the switch prior to further participation.

5.11.3. Any qualifying engine may be subject to tear down.

5.11.4. The top five engines may be required to submit to an engine inspection immediately following qualifications at the discretion of the Safety Committee.

5.11.5. Qualification engines may be marked for identification.



6. PENALTIES

6.1. GENERAL

6.1.1. PGPF may penalize any Member for any violation of the Rules. If an Official observes or is made aware of an act or omission by a Member that constitutes a violation of the Rules, the Official shall promptly report the violation to PGPF. PGPF shall consider the report and shall conduct whatever additional inquiry it deems appropriate under the circumstances. After concluding the inquiry, PGPF shall determine whether disciplinary action is appropriate and if so, what disciplinary action should be taken. The Member shall be informed of the determination and if disciplinary action is imposed, PGPF shall issue a penalty notice to the Member specifying the violation, a brief statement of the circumstances of the violation, and the penalty imposed. If the act or omission of a Member is determined by PGPF to constitute a threat to the integrity or safety of the Event, PGPF may take immediate action against the Member.

6.2. SCOPE OF PENALTIES

6.2.1. If a penalty is assessed during the course of the Main Feature or a Sprint Race, the crew chief of the penalized kart will be notified immediately by the Pit Coordinator. It is the decision of the Race Director(s) if a kart should be brought in, or if the crew chief notification is sufficient.

6.2.2. Violations of Race Procedures generally result in penalties imposed during on-Track activity.

6.2.2.1. **Black Flag** - PGPF may impose black flag penalties.

6.2.2.1.1. If a team receives three black flags during an event, they may be disqualified from the event at the discretion of the Race Director(s) and Internal VP.

6.2.2.1.2. These black flag infractions will be recorded by a member of the foundation and be updated during each Grand Prix event.

6.2.2.1.3. If a team is disqualified from a practice, they will be prohibited from attending the subsequent event, and their laps will not be recorded.

6.2.2.1.4. If receiving a black flag while on track, the kart must immediately return to their pit spot and stay until a member of PGPF has explained the reason for the black flag and stated that they may return to the track. Reference Appendix Q for corner numbers mentioned by the PGPF member.

6.2.2.2. **Laps** - PGPF may impose lap penalties. Lap penalties shall be imposed in complete laps only. The imposition of a lap penalty shall result in the removal of official credit for



the specified number of penalty laps from the total laps credited to the Competitor and the scoring records and all points and awards shall reflect the removal of penalty laps.

6.2.2.3. **Time** - PGPF may impose time penalties. The imposition of a time penalty may result in the removal or addition of the specified amount of time to the Competitor and the timing and scoring records and awards shall reflect the removal or addition of time.

6.2.2.4. **On-Track Repositioning** - PGPF may impose a repositioning penalty during on-Track activities. The reposition penalty will result in an order change of the kart's on-Track position.

6.2.2.5. **Disqualification** - PGPF may disqualify the Member. Disqualification shall entail the loss of any right to compete in the remainder of the current Event from the time at which the disqualifying condition first occurred.

6.2.3. Violations of non-Race procedures generally result in penalties imposed during off-Track activity.

6.2.3.1. **Additional Appearances and/or Meetings** - PGPF may require a Member to attend and actively participate in appearances and/or meetings in addition to those required of the Member pursuant to the Rules and any other agreements. PGPF may specify the due date for completion. Failure to attend and/or participate by the due date may result in reinstatement of the monetary fine if a monetary fine was imposed, or additional penalties as determined by PGPF.

6.2.3.2. **Monetary Fines** - PGPF may impose monetary fines and specify a payment deadline. Failure to pay any imposed fine may result in the disqualification of a team from the Event.

6.2.3.2.1. Monetary fines must be paid via cash or check to the Purdue Grand Prix Foundation through the Business Office for Student Organizations.



7. PROTESTS

7.1. GENERAL

- 7.1.1. Protests shall be submitted in writing to the Race Director(s) using official forms provided by PGPF. See Appendix C
- 7.1.2. A \$50 protest fee shall accompany the forms and will be returned if the protest is found to be accurate.
- 7.1.3. All karts involved in a protest will be impounded until final action of the Safety Committee.
- 7.1.4. A decision will be made by the reviewing body and a written statement will be delivered to all relevant parties on the final ruling.

7.2. TYPES OF PROTEST

- 7.2.1. **Scoring Protest** - A protest on the unofficial results of qualifications, sprint races, or the main event.
 - 7.2.1.1. The reviewing body shall be composed of the Scoring Director(s), Race Director(s), and the Internal Vice President.
- 7.2.2. **Technical/Safety** - A protest between karts in sections 9 (TECHNICAL REQUIREMENTS) or 10 (SAFETY EQUIPMENT) of these rules.
 - 7.2.2.1. The reviewing body shall be the Safety Committee.
- 7.2.3. **Competition** - a protest between karts on any of these rules not included in sections 9 (TECHNICAL REQUIREMENTS) or 10 (SAFETY EQUIPMENT).
 - 7.2.3.1. The reviewing body shall be the Race Director(s) and the Internal Vice President.

7.3. DEADLINES

- 7.3.1. Sprint race protests must be submitted within five minutes of the completion of that race.
- 7.3.2. Main event protests must be submitted within one hour after the completion of the race.



8. APPEALS

8.1. APPEALS TEAM MAKEUP

8.1.1. The Appeals Team is made up of four voting and four non-voting members.

8.1.1.1. Voting members are one Purdue Director of Student Involvement, Student Activities and Organizations Representative and two appointed Racing Experts.

8.1.1.2. Non-voting members are the Internal Vice President, two Race Directors, and one Safety Team Member. In the event that there is a tie, the Internal Vice President will become a voting member.

8.2. DETAILS

8.2.1. Any competitor may appeal any penalty or decision assessed during technical inspection, qualifications, pre-race or post-race.

8.2.2. All appeals will be heard, reviewed, and decided by a third-party appeals team. The original decision shall remain in effect until the decision of the appeals team is rendered.

8.2.3. The appeals form must be submitted in writing to the Race Director(s) accompanied by a \$200 appeal fee within the time limit (as defined in 8.3) after rendering of the protest decision. This paperwork is to include a copy of the original appeal and reasons for appeal. See Appendix D.

8.2.4. Upon receipt of the appeal, the appeals team will meet to review the infraction versus the rule(s) in question. The voting members will make their decision based on the written rules. They may ask the race directors, Race Official or race team questions during their review if they so desire. Upon making their decision, they will discuss with the race directors and Race Officials to assure the resulting decision backs up the written rules.

8.2.5. Once the appeal decision is finalized, a short-written appeal decision will be submitted to the race directors. The race directors will then relay the appeals team decision to the race team.

8.2.6. The third-party appeals team may confirm, reduce, or waive the original protest decision. The appeal fee will be returned to the race team if the protest decision is reduced or waived.

8.2.7. The decision of the third-party appeals team is final.

8.3. APPEAL TIMING

8.3.1. Time to appeal protest decision:

8.3.1.1. Technical Inspection - 8 hours.

8.3.1.2. Qualifications - 8 hours.

8.3.1.3. Pre-race - 30 minutes after the final sprint race.



8.3.1.4. Post-race - 1 hour.

8.3.2. Time for appeals team to render decision:

8.3.2.1. Technical Inspection - 8 hours.

8.3.2.2. Qualifications - 8 hours.

8.3.2.3. Pre-race - 30 minutes.

8.3.2.4. Post-race - 6 hours.



9. TECHNICAL REQUIREMENTS

9.1. PRE-RACE INSPECTION

- 9.1.1. All karts and supporting equipment must pass technical inspection before participation in practice, qualifications, or the race.
- 9.1.2. No changes may be made to the karts or supporting equipment after passing technical inspection except: paint or decals for Race Day or repairs due to an accident. Passing technical inspection does not guarantee compliance with these rules.
- 9.1.3. A kart may be protested and/or disqualified because of noncompliance with any rule in this package per discretion of PGPF.
- 9.1.4. Kart and driver set-up must not deviate significantly after passing technical inspection to the point that the kart becomes noncompliant.
- 9.1.5. Karts must always comply with the rules.
- 9.1.6. The Safety Committee has the right to inspect any kart at any time for any reason.
- 9.1.7. Each kart will be allowed a total of two scheduled inspection times. Failure to pass the second technical inspection may result in disqualification from the Event. A kart must be fully assembled to pass tech.
- 9.1.8. If any previously approved piece of a kart breaks after the second inspection, teams must show evidence of the break before having the new piece re-inspected.
- 9.1.9. Only members of the crew can be present during the technical inspection process. Nonmembers of kart teams may stay in the designated drop off point but may not enter the inspection area. If anyone other than crew members are present during the inspection process, the team's kart will be disqualified, as determined by the Grand Prix Race Director(s) and Internal VP.

9.2. POST-RACE TEAR DOWN INSPECTION

- 9.2.1. The karts finishing in the first five positions at the end of the race shall submit to a mandatory engine tear down performed by a third-party inspector. Drivers and karts placing in these positions must go directly to the designated impoundment location without stopping in their pit box.
- 9.2.2. Karts placing sixth and seventh must remain at the track (with a PGPF representative) and available to come to tech should anyone fail the tech inspection. Should any of those placed sixth and seventh leave the track after the completion of the race, they will forfeit their right to enter the top five.



9.2.3. Any other impounded karts may be required to submit to this tear down during the impoundment period.

9.2.4. All crews shall be responsible for any modifications found during tear down.

9.2.5. Teams are required to provide all required tools for their own engine tear down.

9.2.6. Refusal of the crew chief to disassemble the kart or engine shall result in immediate disqualification.

9.2.7. If a kart should use a different engine in the race than was used for qualifications, then the qualification engine shall be brought to the tear down in addition to the race engine.

9.2.8. During inspection of the engine, only one member of the official crew and the driver of the kart being inspected may be present with the inspector. Any other unofficial member or outside personnel present in the inspection area at the time of inspection will lead to that team's disqualification, as determined by the Grand Prix Race Director(s) and Internal VP.

9.2.9. The third-party inspector's decision is final. See Appendix L for the Post-Race Tear Down Inspection Checklist.

9.2.10. Karts failing the Post-Race Technical Inspection will be disqualified and their finishing position will be forfeited.

9.3. MATERIAL SPECIFICATION

9.3.1. The following material specifications may be changed if prior written approval is secured from the technical inspectors.

9.3.2. SPEC 1

9.3.2.1. 1" by 0.083" wall thickness seam welded or seamless round steel tubing.

OR

9.3.2.2. Unbent 1" by 0.083" wall thickness radius corner square seamed welded or seamless steel tubing.

OR

9.3.2.3. 1" by 2" by 0.083" wall thickness rectangular steel tubing.

OR

9.3.2.4. 1" by 0.125" wall thickness seam welded or seamless round 6061-T6 Aluminum tubing.

OR

9.3.2.5. 1.125" by 0.083" wall thickness welded or seamless round 6061-T6 Aluminum tubing.

OR



9.3.2.6. 1.25" by 0.083" wall thickness welded or seamless round 6061-T6 Aluminum.

9.3.3. SPEC 2

9.3.3.1. 18 gauge or heavier sheet steel or aluminum.

9.3.4. SPEC 3

9.3.4.1. SAE class five (5) bolt is a six-line cap screw.

OR

9.3.4.2. Metric Class 10.9 or 12.9 cap screw (NOT 8.8).

9.3.5. SPEC 4

9.3.5.1. Lightweight aluminum (16-24 gauge) is the only material allowed for use as fairings, cowlings, and shields.

9.3.6. SPEC 5

9.3.6.1. Any mounting other than a welded tab is subject to the discretion of the safety and race officials.

9.3.7. SPEC 6 - Allowable Plastic Items

9.3.7.1. To reduce fire hazard the only plastic items allowed on the kart are:

9.3.7.1.1. The seat.

9.3.7.1.2. Number panels.

9.3.7.1.3. Mirrors.

9.3.7.1.4. Cable ties.

9.3.7.1.5. Commercially manufactured clutch scoops.

9.3.7.1.6. Chain guards.

9.3.7.1.7. Engine information display monitor.

9.3.7.1.8. Upper and lower steering block.

9.3.7.1.9. Cameras and camera mounting brackets.

9.3.7.1.10. Fuel filters.

9.3.7.1.11. Airbox and filter (silencer).

9.3.7.1.12. Transponder and mounting bracket.

9.3.7.1.13. Data logger.

9.3.7.1.14. Chain oiler.

9.3.7.1.15. Throttle cable guides.

9.3.7.1.16. Commercially manufactured floor pans.

9.3.7.1.17. Commercially manufactured front, rear, and side bumpers.

9.3.7.1.18. Column/steering fairings.



9.3.7.2. Exceptions to this rule can be made if documented proof of fire retardancy from the manufacturer is provided and approved by a variance form (Appendix B) through the Safety Committee. This documented proof must be present at all times.

9.3.8. SPEC 7 - Composite Materials

9.3.8.1. The use of composite materials, including, but not limited to, carbon fiber, fiberglass, Kevlar, will not be allowed on karts unless otherwise indicated in the rules and specification or as deemed appropriate by the Race Officials. Decorative stickers made to look like carbon fiber weaving or similar should be easily identified as being a sticker and that the material underneath meets all requirements.

9.4. KART SPECIFICATIONS

9.4.1. All subsequent rules in this section will be interpreted by the technical inspectors who, along with the Race Director(s), will determine the acceptability of each kart.

9.4.2. Inspection Stickers

9.4.2.1. The inspection sticker, indicating a kart has been accepted, shall be positioned at a conspicuous place on the kart chosen by the Race Director(s) at technical inspections.

9.4.3. Main Frame

9.4.3.1. Generally, stock commercially manufactured sprint kart frames will be acceptable.

9.4.3.2. No enduro or lay down karts will be allowed to enter the race.

9.4.3.3. Nerf bars are a required part of the kart frame.

9.4.4. Safety Frame

9.4.4.1. Roll Bar/Cage

9.4.4.1.1. The roll bar must meet or exceed material Specification 1.

9.4.4.1.2. It must be of such a design to enclose and protect the driver in case of rollover.

9.4.4.1.3. All cages must be of at least a four-point design and have gussets at each intersection of the roll bar and the roll cage.

9.4.4.1.4. Two points must extend in front of the driver to prevent any large obstacles from coming in contact with the driver.

9.4.4.1.5. Gussets are to be at least the same thickness as the wall thickness of material Specification #1 and at least be two (2)" long by two (2)" high.

9.4.4.1.6. The roll bar must be of one (1) piece construction and be a minimum of eight (8)" wide or have a minimum radius of four (4)" at its highest point.

9.4.4.1.7. Gussets may also be required at other areas of structural concern as determined by the Technical Inspectors.



9.4.4.1.8. No part of the driver's body may stick out from the roll cage.

9.4.4.1.9. There must be a four (4)" clearance from the helmet to the top of the cage and all around the helmet.

9.4.4.1.10. The roll cage must be attached to the main frame.

9.4.4.1.11. Bolt heads should be on the outside of the cage.

9.4.4.2. Bumpers and Side Bars

9.4.4.2.1. Bumpers, side protection bars, and attachments to the frame must meet or exceed material Specification 1.

9.4.4.2.2. Bumpers and sidebars must be six (6)" minimum effective height as measured from the top of the bumper to the bottom of the bumper and must be in a vertical line with each other.

9.4.4.2.3. Bottom bars must be seven (7)" or less above the ground and top bars must be six (6)" or more above the bottom bar.

9.4.4.2.4. Distances shall be measured from the centerlines of the bars.

9.4.4.2.5. Bumpers must be designed so that the bumper of another kart will not pass through them.

9.4.4.2.6. Bumpers and side bars must not extend beyond the outside edge of the tires physically on the kart.

9.4.4.2.7. The bumpers and sidebars must be connected with metal material to prevent bumper hooking.

9.4.4.2.8. Bumpers must be attached to the main frame of the kart.

9.4.4.2.9. CIK Approved plastic rear bumpers may take place of metal bumpers as described in 9.4.4.2. so long as they are installed to manufacturer specifications.

9.4.4.2.10. Plastic side bumper and plastic front bumper panels must be placed over the metal side bumpers and front bumper as described in 9.4.4.2. and secured as designed by the manufacturer of the panels.

9.4.4.3. Foot and Leg Protection Bars

9.4.4.3.1. Foot and leg protection bars and braces must meet or exceed material specification #1 and be an integral part of the roll cage, i.e., welded to the sidebars or bumpers.

9.4.4.3.2. Leg and foot protection bars shall be attached to the side rails such that one bar passes over the knees. There must be a minimum clearance of two (2)" over the top of the knees.



9.4.4.3.3. The bars must be braced forward to the front bumper by two or more braces.

9.4.4.3.4. Adequate protection bars must be provided to prevent another kart from penetrating the driver's compartment. A guard must prevent the driver's feet from touching the ground.

9.4.4.3.5. Plastic column fairings must be installed to manufactured specifications with safety wire through each bolt.

9.4.4.4. Roll Cage Attachment

9.4.4.4.1. The roll cage must be bolted and cotter pinned or wired securely to the frame by at least one (1) point in the front and one (1) point in the rear.

9.4.4.4.2. A minimum 3/8" Grade 5 bolt is required.

9.4.4.4.3. These mounts must be located along the geometrical center of the kart if only one mounting bracket is being used.

9.4.4.4.4. Heim Joint fastener threads must be a minimum of 3/8" in diameter.

9.4.4.4.5. No elastic straps or cord will be allowed.

9.4.4.4.6. All roll cage attachment bolts must be visible for inspection.

9.4.4.5. Construction of Safety Frame

9.4.4.5.1. All open tubing shall be caulked 1" deep or plugged with rubber or similar materials. All plugs must be secure and in good condition.

9.4.4.5.2. The safety frame shall be completely smooth; all rough surfaces shall be filed.

9.4.5. Use of Mounting Blocks

9.4.5.1. Mounting blocks are approved for use in attachment of the safety frame, muffler, fuel tanks, and other areas provided:

9.4.5.1.1. All bolts must pass completely through the block with nuts and cotter pins (or safety wire) on the back side

9.4.5.1.2. Any bolts used to attach the safety frame must meet the safety frame attachment specs above

9.4.5.1.3. Any blocks used to attach the safety frame must completely enclose the bars with bolts on both sides, not simply "clamp" onto the frame.

9.4.6. Wheelbase

9.4.6.1. The Wheelbase of the kart shall be between 40" and 66" measured from the axle centers

9.4.7. Kart Width



9.4.7.1. The total width of the kart shall be at minimum of 30" and a maximum of 55 1/8" outside to outside of tire or kart.

9.4.8. Tires

9.4.8.1. Tire softener will not be allowed anywhere on the premises.

9.4.8.2. Only Hoosier Kartsport tires are allowed.

9.4.9. Wheels

9.4.9.1. Axle nuts shall be castellated and secured with cotter pins or as the manufacturer intended.

9.4.9.2. Safety wire or bolts through the axle are not acceptable

9.4.9.3. All wheels shall be of racing quality and void of any defects.

9.4.10. Seat Back and Floor Pan

9.4.10.1. The floor pan must meet or exceed material Specification 2.

9.4.10.2. Seat shall be a molded, one-piece sprint bucket design and be the correct size for the driver so they cannot move or slide from side to side in a manner that could be unsafe. Commercially manufactured fiberglass or carbon fiber seats are required. (See Appendix G).

9.4.10.3. Lay down type seats are illegal (See Appendix G).

9.4.10.4. Seat cannot be cut in any way to add or remove material and shall be in safe condition, e.g., the bottom is not weak or broken. Final decision will be determined by the Race Directors and/or Race Officials.

9.4.10.5. Bottom of seat shall be between the frame rails and either mounted flush with or above the frame rails. Seat shall be mounted to the kart in a minimum of four spots with front of seat being higher than the bottom. Adjustable seats that can be moved while on track are illegal.

9.4.10.6. All seat attachment points must be safety wired, a seat attachment point is defined as a fastener that is directly responsible for ensuring that the seat does not become separated from the chassis. Teams do not have to safety wire seat adjustment points that are not vital for securing the seat to the chassis. The integrity of the tubing material may not be compromised, flat stock will not be permitted for the seat mount.

9.4.11. Headrest and Harness Support

9.4.11.1. Padding the safety cage alone will not be an acceptable headrest system meeting the performance criteria of this rule.



9.4.11.2. A headrest and harness support system must be provided with the following features:

9.4.11.2.1. Must meet or exceed material Specification 1.

9.4.11.2.2. Must keep the head in alignment with the spinal column in a neutral position without pushing the head forward or allowing it to extend backward.

9.4.11.2.3. May not be part of, supported by, or attached to the roll cage (safety frame).

9.4.11.2.4. Typically, should be mounted to the shoulder belt support, although it can be attached separately to the kart main frame depending on the design.

9.4.11.2.5. The headrest must provide a flat area with a minimum dimension of 6" across to maximize contact with the helmet.

9.4.11.2.6. Must be padded with rubber, foam, or other shock absorbing materials

9.4.11.2.7. Must be 1" minimum thickness with no sharp edges exposed.

9.4.11.2.8. The center back area of the helmet shall make contact with the center point of the headrest.

9.4.11.2.9. An adjustable height headrest is recommended to accommodate drivers of different heights and must be secured by a bolt with a cotter pin.

9.4.11.3. Seating the driver and relief driver in the kart with their helmet on will be the method used to assess the headrest during inspection.

9.4.12. Fuel Tank

9.4.12.1. Exchange fuel tanks are mandatory. No other fuel system will be allowed.

9.4.12.2. Fuel tanks must be completely protected by the safety frame.

9.4.12.3. The fuel tank must be of racing quality as determined by the technical inspectors.

9.4.12.4. Only one (1) fuel tank of seven (7) quart maximum capacity is permitted on the kart at any time.

9.4.12.5. Fuel tanks must have an accessible valve attached to the tank, which positively shuts off fuel flow at the point of discharge.

9.4.12.6. A firewall (splash shield) must enclose three sides, the bottom and the rear of the fuel tank; the height of the firewall must be at least 3/4" higher than the height of the fuel tank.

9.4.12.7. All edges of the firewall must be rolled, folded under, or cornered with rubber or comparable material for maximum safety.

9.4.12.8. *Design Engineering 050501* or similar shielding is permitted on the interior of the firewall. Other types of firewall lining must be approved by a race official.



- 9.4.12.9. The firewall must be securely attached to the nerf bars or main frame.
- 9.4.12.10. The fuel tank must be mechanically secured in such a way that if the connector between the tank and the fuel line is breached the tank will remain in position (i.e. a safety pin in addition to the quick disconnect). This additional securement should be tethered.
- 9.4.12.11. Fuel tanks must incorporate either a check-valve or an approved vent relief cap into the vent system. This means the fuel fill cap must be positively sealed so the fuel tank is vented to the atmosphere through the check valve or vent relief cap.
- 9.4.12.12. The venting mechanism must be installed in a safe manner as determined by the technical inspectors.
- 9.4.12.13. No silicon rubber will be permitted, and hose barbs should be silver soldered to the vent cap.
- 9.4.12.14. Venting mechanism must not allow any flow of gasoline.
- 9.4.12.15. Any check valve or vent relief cap not properly functioning will need to be immediately removed from the track.

9.4.13. Exchangeable Fuel Tanks

- 9.4.13.1. Exchangeable fuel tanks are fuel tanks that can be removed and replaced with an exact duplicate.
- 9.4.13.2. Elasticized fasteners will not be allowed to secure fuel tanks.
- 9.4.13.3. The design and the final product must be approved by the technical inspectors before being used but technical approval of the tank in no way indicates approval of the volume.

9.4.14. Fuel Lines

- 9.4.14.1. Commercial, metal worm-gear hose clamps, spring back clamps, or two full loops of safety wire shall securely clamp all fuel lines at both ends of each section, so the fuel line cannot move.
- 9.4.14.2. All fuel system components except for the tygon tubing and the vent components, must be made of a metal material.
- 9.4.14.3. Fuel lines shall be gasoline tygon tubing in good condition.
- 9.4.14.4. Fuel lines will be no longer than necessary to cover the distance from the fuel tank to the engine.
- 9.4.14.5. Fuel filters may be no larger than normal small engine filters.



9.4.14.6. Fuel lines must be fastened below the seat, above the frame, and must not go over the driver.

9.4.15. Throttle

9.4.15.1. Karts shall be equipped with a foot-operated throttle with two return springs, which will close the throttle when the pedal is released. One spring must be on linkage at the point of contact to the frame.

9.4.15.2. The Safety Committee must approve any exceptions through a variance form.

9.4.16. Brakes

9.4.16.1. All karts shall have pedal operated brakes operating in such a manner as to brake both rear wheels equally.

9.4.16.2. Brake linkages must have at least two (2)" clearance off the ground.

9.4.16.3. A cotter pin must be placed through the pivot pin, which connects the brake linkage lever to the master cylinder.

9.4.16.4. Disc brake discs must be at least 1/8" thick.

9.4.16.5. Brakes must be able to lock both rear wheels at maximum speed.

9.4.17. Clutches

9.4.17.1. All karts shall be equipped with a clutch, which will allow the kart to stand still with the engine running.

9.4.17.2. Third bearing support is required.

9.4.17.3. Must be attached with a minimum of two bolts with drilled heads and safety wired to each other.

9.4.17.4. No axle clutches are allowed.

9.4.18. Gearboxes

9.4.18.1. Selective gearboxes or other transmission devices are permitted as long as no oil leaks from the device.

9.4.18.2. There is no maximum gear ratio.

9.4.19. Chain Guard

9.4.19.1. Karts shall be equipped with a chain, belt, or gear guard to eliminate possibility of personal injury, covering all pinch points.

9.4.19.2. The gear guard must be at least equal in diameter to the gear used.

9.4.20. Chain Oilers



9.4.20.1. If applicable, a chain oiler shall have a maximum capacity of eight ounces and must be properly hardware mounted and safely tied so that it does not allow fluids to spill on the track.

9.4.21. Steering

9.4.21.1. The steering shall be direct acting and of suitable design for maximum safety and prevention of over center lock.

9.4.21.2. The steering shaft shall be solid steel of minimum diameter of 5/8" or tubular steel of minimum diameter 19 mm.

9.4.21.3. The steering wheel hub shall be secured to the shaft by a cotter pin, castellated nut.

9.4.21.4. All steering assembly bolts shall be grade 5 or higher and a minimum of 1/4" in diameter.

9.4.21.5. All steering assembly nuts shall be castellated, and cotter pinned or safety wired.

9.4.21.6. All rod ends shall be protected from collision.

9.4.22. Steering Wheel

9.4.22.1. The steering wheel shall be attached to the hub by at least three cotter pin bolts with cotter pinned nuts or by bolts with safety wired heads if a thread hub is used.

9.4.22.2. Any sharp protrusions shall be covered, but all nuts and bolts must be available for inspection.

9.4.23. Front Spindle and Rear Axle

9.4.23.1. The front spindle and rear axle shall not extend beyond the wheel widths.

9.4.23.2. The rear axle shall be at or between 30 and 50 mm in diameter and be either steel or aluminum or approved equivalent construction and strength.

9.4.24. Exhaust System

9.4.24.1. Mufflers shall be on all karts securely mounted and cotter pinned.

9.4.24.2. All portions of the muffler shall be contained inside the roll cage and not be attached to it.

9.4.25. Welds

9.4.25.1. Only welds of high quality, as determined by the Race Officials, shall be acceptable.

9.4.25.1.1. Failure to comply may result in disqualification

9.4.25.2. All new construction or repairs must be TIG welds.

9.4.25.3. Butt welds must be reinforced by an inner sleeve at least twice the tubing diameter in length.



9.4.25.4. One 1/8" hole per weld must be drilled into the sleeve area to indicate the presence of the sleeve.

9.4.25.5. Any non-factory frame welds must be clean and unpainted for any inspection.

9.4.25.6. No plastic body filler or lead will be allowed in seams.

9.4.26. Castellated Nuts and Cotter Pins

9.4.26.1. Kingpins, pedal attachment points, steering wheel bolts, seat belt fastenings, fuel tank mountings, safety frame, and all parts of the brake, throttle, and steering linkages shall be cotter pinned.

9.4.26.2. All cotter pins shall fit snugly in the holes and pass through the nuts or through the serrated sections of castellated nuts.

9.4.26.3. All other bolts must be at least Grade 5 and cotter pinned or secured with safety wire passing through the bolt, with the following exceptions:

9.4.26.3.1. Engine bolts other than third bearing bolts.

9.4.26.3.2. Rear axle hubs, sprockets, and brake rotor assemblies.

9.4.26.3.3. Any generally inaccessible bolts (i.e. Rear wheel lugs) subject to the discretion of the safety committee.

9.4.26.4. No nylon-fiber locknuts are allowed except in use with the engine mounts, chain guard, and floor pan. The front axle nuts must be cotter pinned.

9.4.26.5. Distorted nuts may be used; however, they still must be pinned or wired.

9.4.26.6. Circlips are an acceptable substitution for cotter pins and safety wire provided the bolt is designed for circlips.

9.4.27. Kill Switch

9.4.27.1. All karts shall be equipped with a toggle cut off switch that will disrupt the ignition spark and shut off the engine.

9.4.27.2. The switch shall be mounted on the steering column brace by the steering wheel or on the steering wheel with easy access.

9.4.27.3. The kill switch shall be a single pole, single throw switch.

9.4.27.4. Kill Switch must be demonstrated at Tech Inspections and Qualifications.

9.4.28. Starters and Batteries

9.4.28.1. All starter motors shall have a workable on/off switch. Wiring on these motors shall have standard battery connections so as to provide spark-free operation.

9.4.28.2. Starter motors shall be an inspection item.



9.4.28.3. Starter motors must be securely attached to a battery at all times. This includes any time the starter motor is at the track.

9.4.28.4. All batteries must be in an enclosed container with a lid that is securely attached to the container at all times. A marine battery type container is strongly recommended.

9.4.28.5. Self-contained battery/starter units are acceptable only if electrical insulation is provided to the positive and negative terminals, which prevents shock hazards and any potential for shorting the battery.

9.4.28.6. All electrical connections must have a plastic cover; taped terminals will not be accepted.

9.4.29. Kart Identification

9.4.29.1. Kart Numbers

9.4.29.1.1. Numbers will be assigned on a first come, first served basis except for #1, which will be reserved for the previous year's winner. If the previous year's winner waives the reserved #1, it will be available to any team on a first come, first serve basis.

9.4.29.1.2. The winner of the Halloween Hundred from the same academic year will have the ability to keep the same number from the Halloween Hundred. If they decide to change their number, their old number would be available to any team on a first come, first serve basis.

9.4.29.1.3. Numbers may range from 0 to 99.

9.4.29.1.4. Single digit numbers may have leading zeros placed in front of them. When a kart is assigned a single digit number, the single digit number and that number with a leading zero are taken by that kart. For example, if a kart is assigned #1 then #01 is not available to be used by other karts, and if a kart is assigned #01 then #1 is not available to be used by other karts. This applies to numbers 0 to 9.

9.4.29.1.5. Numbers that are retired cannot be used in any PGPF event. The list of retired numbers are as follows: #20.

9.4.29.2. Number Panel Requirements

9.4.29.2.1. One number panel in the front of the kart, which is readable from the front and the top (for recognition from the flag bridge).

9.4.29.2.1.1. Front number panels must be placed above the front bumper where they are not subject to damage.

9.4.29.2.2. One number panel in the rear (readable from both sides).



OR

9.4.29.2.3. A number panel placed on both sides.

9.4.29.2.3.1. Rear and side numbers must be placed high on the safety cage.

9.4.29.2.4. Number panels shall be at least seven (7)" by nine (9)" but no more than eight (8)" by ten (10)".

9.4.29.2.5. Numbers must be at least five (5)" tall.

9.4.29.2.6. White number panels are to be used by non-rookie drivers only. Yellow number panels must be used by rookie drivers and may be used by non-rookie drivers.

9.4.29.2.7. Only painted or Mylar stick-on numbers are allowed. Motor cross numbers are acceptable, but no taped numbers will be allowed.

9.4.29.2.8. All number panels shall be made of substantial material, and all edges shall be either rolled, folded under, protected with rubber or comparable material edging for maximum safety.

9.4.29.2.9. All number panels must be on the kart at all times.

9.4.30. Wings

9.4.30.1.1. Wings will be allowed, but the Safety Committee must approve both the plans and the final product. Wings shall not exceed the width of the safety frame.

9.4.31. Electronic Devices

9.4.31.1.1. The only electronic devices allowed inside the track facility are:

9.4.31.1.1.1. Approved radio equipment for communication with the driver.

9.4.31.1.1.2. Approved video cameras.

9.4.31.1.2. Electronic devices not allowed include but are not limited to:

9.4.31.1.2.1. Mobile phones.

9.4.31.1.2.2. Music players.

9.4.31.1.2.3. Apple Watches and Fitbits.

9.4.31.1.2.4. AirPods and headphones.

9.4.31.1.3. Track workers are not permitted to use any electronic device while on the track.

9.4.32. Cameras

9.4.32.1. Cameras found on the track may result in a \$50 fine.

9.4.32.2. Cameras are allowed on karts provided they meet the following:

9.4.32.2.1. Mounted to the kart only on the inside of the roll cage.



9.4.32.2.2. Helmet mounted cameras are only permitted during practices.

9.4.32.2.3. Cameras must be approved by the Safety Committee during technical inspections.

9.4.32.2.4. Cameras must be tethered to the kart with safety wire in addition to the camera mount.

9.4.32.2.5. Any cameras mounted after technical inspections must be approved by the safety committee.

9.4.33. Ground Clearance

9.4.33.1. Drive sprocket must have a clearance of at least 0.5".

9.5. WEIGHT

9.5.1. The combined weight of the kart and driver must always exceed 360 pounds. The minimum weight shall be measured when the kart is in competition configuration.

9.5.2. Addition of Weight

9.5.2.1. All non-structural weights added to meet minimum kart/driver weight requirements must be bolted securely to the main frame, floor pan of the kart, or back of the seat with a 1" fender washer, painted white, and clearly labeled with the kart's number.

9.5.2.2. Bolts of minimum 5/16" diameter must be used to secure weights and these bolts must be cotter-keyed or wired. For weights attached to the seat, a washer must be placed on both sides of the seat to prevent damage.

9.5.2.3. Mounting of weights to nerf bars are prohibited.

9.5.2.4. No plastic containers holding water or metal pellets are allowed.

9.5.2.5. Filling the frame structure with metal pellets is prohibited.

9.5.2.6. The approval of the attachment location and manner in which the weights are attached is at the discretion of the Race Officials.

9.5.3. Weigh In Procedure

9.5.3.1. Each kart and driver will be weighed at tech inspection.

9.5.3.2. Kart and driver may be weighed at any PGPF event at foundation's discretion.

9.5.3.3. On qualification day, the kart and driver will be weighed before their qualification run.

9.5.3.4. At the conclusion of the race, the top 5 karts and drivers will be weighed prior to the Post Race Technical Inspection. Any top five finisher that does not meet the minimum weight will be disqualified.



9.6. ENGINE

9.6.1. Eligibility

9.6.1.1. Only the Yamaha KT-100S engine (spec per World Karting Association, see Appendix K) is legal for competition in the Grand Prix. This engine is an internal combustion engine of the two stroke cycle type.

9.6.1.2. Modifications or alterations are prohibited with the exception of over-boring for wear up to, but not exceeding, a maximum bore size of 2.090 inches.

9.6.1.3. Maximum displacement is 100cc.

9.6.1.4. Internal parts may be interchanged as long as replacement parts meet stock specifications.

9.6.1.5. Only one engine may be mounted to a kart.

9.6.2. Fuel and Oil

9.6.2.1. Crews are responsible for providing their own fuel. However, all fuel must still conform to existing rules concerning any prohibited substances. The crew is wholly responsible for the legality of the fuel mixture used in their kart.

9.6.2.2. Any commercial oil containing special additives is not permitted. Acceptable examples are Klotz, Techniplate, Blendzall White Label, Yamalube, and TC Lubricants.

9.6.2.3. Lubricants which contain special additives such as Blendzall Gold Label, are not acceptable.

9.6.2.4. Fuels will be tested after qualifications, after all races, and at any other time for any other reason at the Race Director(s)'s discretion. Fuel testing, at minimum, will include a Digatron meter test for the dielectric constant. Fuels that read positive when tested will fail the test and not be allowed on the track. Other fuel tests, including but not limited to lab analysis, will be used at the Race Director(s)'s discretion.

9.6.3. Fuel Storage

9.6.3.1. All fuel other than the portion in the kart exchange tanks shall be stored in and dispensed from a flammable liquids safety can. A flammable liquids safety can is a vessel which contains a spring actuated dispensing spout, a flash arrester, vapor release capability and is approved by Underwriter's Laboratory, Factory Mutual or a qualified standard testing laboratory.

9.6.3.2. This rule applies to all fuel cans inside the fence perimeter. All fueling must take place outside of the track facility, with the exception of a fuel tank exchange. The fuel cans must display the inspection sticker provided at technical inspection.



9.6.3.3. All cans will be five gallons maximum.

9.6.3.4. No pressurization of any fuel tanks is permitted.

9.6.4. Silencers

9.6.4.1. All karts must be equipped with a silencer on the intake of the engine.

9.6.4.2. The silencer must be CIK approved two-hole design in accordance with standard karting specifications.

9.6.4.3. The silencer must also be secured to the frame, with a secondary tether or mount. A small hole may be drilled in the solid plastic fin of the silencer to facilitate mounting.

9.6.4.4. Any additional holes in the body of the intake will render it illegal.

9.6.4.5. The baffle tube shall have an inner diameter that is less than or equal to .905”.

9.7. VARIANCE FORMS

9.7.1. The Race and Safety Committees must review any variations from the above rules.

9.7.2. Forms must be submitted within 7 days of the first technical inspection. Late submissions may not be reviewed. The Safety Committee will respond no later than 4 days prior to the second technical inspection.



10. SAFETY EQUIPMENT

10.1. All safety equipment to be used shall be brought to inspection and shall also be available for re-inspection at any time. All equipment should be reasonably clean (free of oil, gas, dust, etc.) and present at all times.

10.2. HELMETS

10.2.1. Helmets must be full faced, a minimum of Snell 2020, SFI 31.1 2020, or FIA 8860-2018 approved, and not older than 7 years from manufacturing date.

10.2.2. All elements of the helmet must comply with manufacturer regulations.

10.2.3. Long hair must be securely fastened beneath the helmet or jacket.

10.2.4. Helmets must meet factory conditions with no detected defects or damages

10.2.5. A sticker will be applied to the helmet at technical inspections, in a position designated by the Race Officials, to ensure the same helmet is used during practices, qualification, and the race.

10.3. DRIVER PROTECTIVE CLOTHING - All drivers shall be required to wear the following:

10.3.1. Gloves of suitable abrasion-resistant material that fully cover the wrist

10.3.2. Neck brace in good condition (i.e. no foam removed, secure Velcro, etc.), which meet the requirements of S.F.I. 3.6.

10.3.2.1. HANS devices may be used as an alternative for neck bracing and safety. The straps on the Hans devices must be a different color than the driver's suit for visibility. HANS devices must be inspected at Tech Inspection.

10.3.3. Full length socks that provide full ankle coverage.

10.3.4. Closed-toe, non-slip-on shoes secured by laces, buckles, or straps required. Canvas shoes will not be permitted.

10.3.5. One of the following:

10.3.5.1. A fire-retardant racing suit that meets or exceeds the SFI3-2A/5 or FIA CIK 88562000 standard (examples of certification labels can be found in the Addendum Section VI).

OR

10.3.5.2. A non-fire-retardant racing suit and at least one layer of Nomex underwear. If the driver chooses to use the Nomex underwear it must be FIA approved or contain a tag showing it contains Nomex fiber.

10.3.6. Driver protective equipment and helmet must cover all exposed skin.



10.4. CREW MEMBER CLOTHING

10.4.1. At all times within the track area all crew members must wear:

10.4.1.1. Shirts that cover entire shoulder area, chest, and stomach.

10.4.1.2. Sturdy, closed-toe shoes with heels no taller than 2 inches.

10.4.1.3. Full length pants (no sweat pants, no jeans with holes, no polyester or plastic clothing, no shorts, no yoga pants) and full-length socks that provide full ankle coverage.

10.4.2. All crew members must wear ANSI Spec Z87.1-2015, equal, or better approved safety glasses while inside track.

10.4.3. Final discretion of clothing allowed is determined by the Safety Committee.

10.5. FIRE EXTINGUISHERS

10.5.1. Each kart shall provide its own fire extinguisher, which must be brought to technical inspection, practice, qualifications, and the race.

10.5.2. All fire extinguishers must be:

10.5.2.1. Gas Class B Underwriters Laboratory approved.

10.5.2.2. A minimum of 2 & 1/2 pounds capacity.

10.5.2.3. Inspected within the calendar year of the race, tagged, and sealed.

10.5.2.4. Carbon Dioxide extinguishers are required.

10.5.3. No dry chemical extinguishers will be allowed.

10.5.4. All fire extinguishers within the pit area must display the inspection sticker provided at the technical inspection.

10.5.5. Fire extinguishers must be on hand when the kart is being started.

10.5.6. Fire extinguishers missing the breakaway pin seal must be re-inspected and resealed.

Cable ties are NOT acceptable replacements for the breakaway seals.

10.5.7. Fire extinguishers may be rented from the Grand Prix Foundation for a \$50 fee. This is a one-day rental; teams are required to have their own fire extinguisher.

10.6. DRIVER RESTRAINT SYSTEMS

10.6.1. A driver restraint system is required on all karts.

10.6.2. A driver restraint system consists of lap and shoulder belts.

10.6.3. All belts must be securely fastened to the main frame or to a fixed bracket system.

10.6.4. Proper fit is at the discretion of the safety and race officials

10.6.5. Documented instructions from the manufacturer on the proper installation of the driver restraint systems shall be presented at technical inspection if a significant deviation from these rules exists.



10.6.6. Attachments

- 10.6.6.1. Attachment point for the lap belt must be welded to the frame, not a clamping bracket (see appendix E).
- 10.6.6.2. U-bolts are not allowed to attach the seat belts to the frame.
- 10.6.6.3. Mounting brackets should be installed at an angle that is compatible with the direction of pull on the webbing under full load (see Appendix E).
- 10.6.6.4. Attachment points and routing should be chosen so as to keep restraint belts at least four inches away from sources of excessive heat or abrasion at the discretion of the Safety Committee.

10.6.7. Arm Restraints

- 10.6.7.1. All karts must be equipped with commercially made Arm restraints with the following:
 - 10.6.7.1.1. Must not allow the drivers arms to extend beyond the roll cage.
 - 10.6.7.1.2. Must be placed just below the bend of the elbow of the driver.
 - 10.6.7.1.3. Must be tight enough to not slip out of place on the driver's arm.
 - 10.6.7.1.4. Must be a different color than the driver's suit or taped with a contrasting color tape.
 - 10.6.7.1.5. The Arm restraints should be worn according to the manufacturer's recommendations.
 - 10.6.7.1.6. Suit integrated Arm restraints are acceptable and must be marked with a contrasting color.

10.6.8. Belts

- 10.6.8.1. SFI rated belts and harnesses are required.
- 10.6.8.2. Safety belts are required to have a width of at least 2".
- 10.6.8.3. No belts or belt supports may be attached to or supported by the roll cage, nerf bars, or bumpers.
- 10.6.8.4. Under no circumstances are bolts inserted through belt webbing acceptable for mounting.
- 10.6.8.5. Belt webbing may be required to be replaced if the webbing shows signs of wear and tear or age.
- 10.6.8.6. Belts with webbing manufacture date of more than three (3) years are not acceptable.



10.6.8.7. Shoulder harness straps/belts must be positively retained to any harness support. For example, a metal rod with cotter keys on both end so that straps do not fall off of shoulders.

10.6.8.8. The shoulder harness bracket system shall be designed so that a load applied in any direction will not result in any movement of the shoulder harness bracket

10.6.9. Hardware

10.6.9.1. Commercial restraint system mounting hardware is recommended.

10.6.9.2. The minimum specification for all hardware used to attach the driver restraint system hardware is 3/8" Grade 5. This applies to ANY and ALL bolts used for the driver restraint system including any brackets.

10.6.9.3. All bolts used in the driver restraint system must be drilled and safety wired or pinned.

10.6.9.4. Documented instructions from the manufacturer on the proper installation of the driver restraint systems shall be presented at technical inspection if a significant deviation from these rules exists.

10.7. AIR TANKS

10.7.1. Any and all air tanks must be commercially manufactured and clearly labeled as a refillable vessel.

10.7.2. The tank shall be made of steel which is at least .048 inches in thickness.

10.7.3. The tank shall have a functioning pressure gauge in good condition, a pressure relief valve set at 20-30 psi over the maximum working pressure, and a maximum working pressure of 200 psi.

10.7.4. Refurbished Freon tanks are not acceptable.

10.7.5. Compressors are not allowed within the track.

10.7.6. Air tanks are optional.

10.7.7. Battery operated tire inflators are permitted to be used inside the pits.

10.8. MIRRORS

10.8.1. Only acceptable mirrors will be of plastic or polished metal. No glass will be permitted.



11. DRIVING PRACTICES

- 11.1. Reckless driving or unsportsmanlike conduct is grounds for penalization or immediate disqualification from the practice session or main event.
- 11.2. All competitors must always be prepared to deviate from the racing line to yield to faster drivers. Failure to do so can result in a Blue or Black flag.
- 11.3. The primary responsibility for avoiding contact with a Competitor resides with the overtaking Competitor and the secondary responsibility resides with the Competitor(s) being overtaken. A Competitor who fails to demonstrate their responsibility and initiates a maneuver that results in contact with another Competitor may be penalized.
- 11.4. All four wheels must always remain on the track except when avoiding a collision.



12. HAND SIGNALS

- 12.1. Drivers must signal by raising one hand so that karts behind them can see if they are driving out of the ordinary pattern, such as exiting to the pits, yellow flag, accidents, etc.
- 12.2. Drivers must signal by raising both hands high in the air if their kart has stalled or spun out, indicating their intention not to make any move until the field passes. Drivers in stalled or spun out karts must always get out and help push or carry the kart. Drivers should remain in their kart if it stalls on the track until track workers get the kart safely off the track. Stalled karts should cross the track only where directed by track workers. If a kart has spun out but is still running, the driver should signal the track workers with only one hand to indicate their wishes to be pushed back onto the track.
- 12.3. All hand signals should be made in such a manner so as not to confuse officials or other drivers on the track.



13. THE "HALLOWEEN HUNDRED" EXHIBITION RACE

13.1. The "Halloween Hundred" is a PGPF-run Fall exhibition race.

13.2. FORMAT

13.2.1. No more than 40 teams shall be registered for the race. 25 teams qualify for the 100-lap race.

13.2.2. Qualification order will be determined by taking the fastest lap times for each team set during the practice sessions.

13.2.3. The scheduled number of laps is 100.

13.2.4. The starting lineup is determined by the fastest single lap time recorded by each kart during the practice sessions, arranged in order from fastest to slowest.

13.3. ENTRANTS

13.3.1.

13.3.2. No changes to the roster may be made after the technical inspection except in extreme cases as determined by the Race Director(s) and Internal VP.

13.3.3. Any driver or relief driver wishing to compete in the race must participate in a minimum of two practice sessions.

13.4. RULES

13.4.1. The "Halloween Hundred" shall be held in accordance with the previous year's rulebook, with the exceptions outlined in sections 13.2 and 13.3.

13.4.2. In alignment with the spirit of the Halloween Hundred as an exhibition race, all protest decisions are final.



APPENDIX A

Medical Insurance Disclaimer, Waiver, Release, and Hold Harmless Agreement

In consideration of permission granted by Purdue University allowing me to participate voluntarily in the practice sessions, qualifications, go-kart race and related activities of the 2026 Purdue Grand Prix, conducted by the Purdue Grand Prix Foundation to be held on the Purdue campus in March and April of 2026 (the "Activity"), I (together with my parent or guardian, if I am under the age of eighteen (18) or under a legal disability) represent, covenant and agree, on behalf of myself and my heirs, assigns, and any other person claiming by, under or through me, as follows:

1. I acknowledge that participating in the Activity involves certain risks (some of which I may not fully appreciate) and that property damage, significant injuries, disability, death, or other harm could occur to me or others. I accept and voluntarily incur and assume all risks of any injuries, damages, or harm that arise during or result from my participation in the Activity, including any associated travel, regardless of whether or not caused in whole or in part by the negligence or other fault of Purdue University, The Trustees of Purdue University, the Purdue Grand Prix Foundation, the Purdue Alumni Foundation, the Race Director(s), the Safety Chairman, and/or any of its or their departments, affiliates, employees, officers, agents, and insurers, together with any and all sponsors of, and all other entrants or participants in, the Grand Prix event (together, the "Released Parties").
2. I am aware that COVID-19 is an infectious virus that spreads easily through person-to-person contact, and could cause serious illness to individuals who have certain medical risk factors. Federal and state public health authorities and Released Parties have issued basic health and safety guidance aimed at mitigating the spread of the virus. I understand that my participation in Activity or accessing facilities owned or managed by Released Parties could increase the risk of contracting COVID-19. Released parties in no way warrant that the protective measures prescribed for the Activity or to access the facilities will completely prevent exposure to the COVID-19 virus. I agree to follow all public health and safety guidelines for the Activity and freely and voluntarily assume the risk of COVID-19 exposure.
3. I waive all claims against any of the Released Parties for any injuries, illness, damages, liabilities or losses, whether known or unknown, foreseen or unforeseen, which arise during or result from my participation in the Activity, regardless of whether or not caused in whole or part by the negligence or other fault of any of the Released Parties. I release and forever discharge the Released Parties from all such claims. I understand this means I give up my right to bring any such claims against the Released Parties.
4. I agree to indemnify and hold the Released Parties harmless from and against any and all losses, liabilities, damages, costs or expenses (including but not limited to reasonable attorneys' fees and other litigation costs and expenses) incurred by any of the Released Parties as a result of any claims or suits that I (or anyone claiming by, under or through me) may bring against any of the Released Parties to recover any losses, liabilities, costs, damages, or expenses that arise during or result from my participation in the Activity, regardless of whether or not caused in whole or part by the negligence or other fault of any of the Released Parties.
5. I acknowledge that I have received, understand and will abide by the 2026 Official Purdue Grand Prix Rules Packet.



6. I hereby grant permission to Purdue University and any organization associated with the Purdue Grand Prix to use, for any legitimate purpose, including future advertising of the Activity on the Purdue website or in other promotional materials, my name and likeness to the extent it may appear in any photographs or records of the Activity.

7. In consideration of being allowed to participate voluntarily in the practice sessions, qualifications, and go-kart race of the Purdue Grand Prix Foundation, I acknowledge the fact that I am not provided with medical coverage by either Purdue University or the Purdue Grand Prix Foundation.

8. I have carefully read and reviewed this Waiver, Release and Hold Harmless Agreement, which is governed by Indiana law. I understand it fully and I execute it voluntarily. I further acknowledge that any dispute or claim related to the subject matter hereof would be subject to the sole and exclusive jurisdiction of courts of competent authority located in Tippecanoe county, Indiana, with such courts to be the sole and exclusive venue for any such action.

Executed this _____ day of _____, 20_____

Participant Signature Participant Printed Name

Parent/Guardian Signature Parent/Guardian Name



APPENDIX B - VARIANCE FORM

Requestor Information

Requestor Name:

Requesting Team:

Requesting Team #:

What are you requesting a variance on?

Rule (Number and Description):

Details

Describe in detail your variance request (attach any supporting documentation):

Approval

Race Director Signature

Date & Time

Decision Rendered:



APPENDIX C - PROTEST FORM

Protestor Information

Protestor Name:

Protestor Team:

Protestor Team #:

Paid? _____

What Are You Protesting?

Scoring

Technical/Safety

Competition

Details

Describe in detail your protest:

Acknowledgement of Receipt

Protestor Signature

Date & Time

Race Director Signature

Date & Time



APPENDIX D - APPEAL FORM

Appellant Information

Appellant Name:

Appellant Team:

Appellant Team #:

Paid? _____

What Are You Appealing?

Scoring

Technical/Safety

Competition

Details

Describe in detail your appeal:

Acknowledgement of Receipt

Appellant Signature




Date & Time

Race Director Signature

Date & Time



APPENDIX E - SEAT BELT COMPONENTS

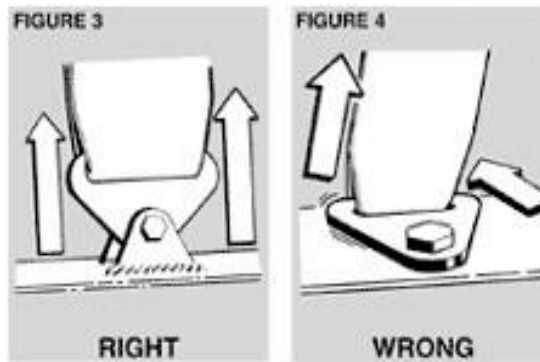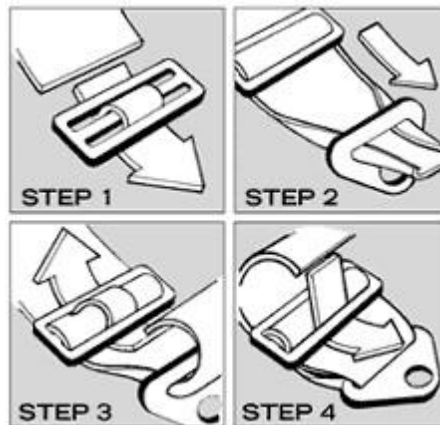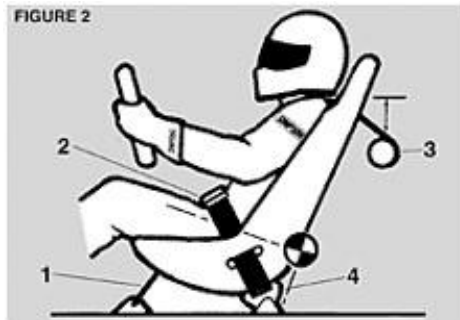




APPENDIX F - ROLL CAGE SPECIFICATIONS

Four inches of clearance between the driver's helmet and the roll cage in all directions.



Four inches of clearance between the driver's helmet and the upper most plane of the kart.



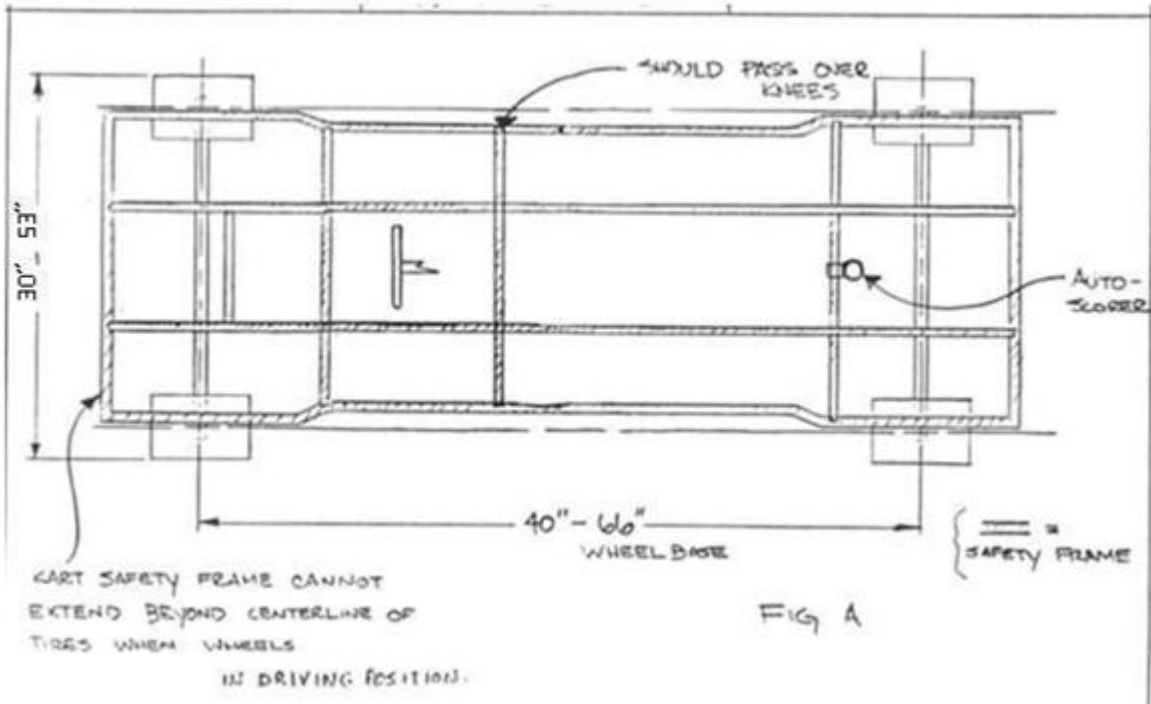




APPENDIX G - SEAT

“A” – Any part of the seat cannot be behind the axle.

“B” – These are minimum measurements.

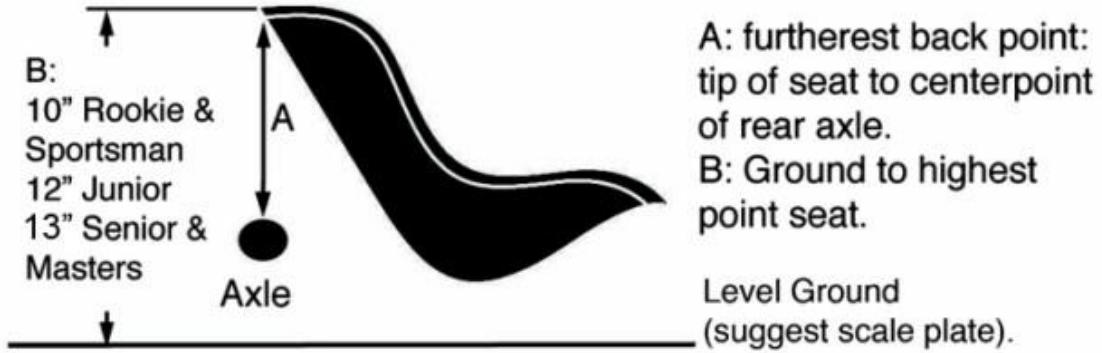



APPENDIX H - HEAD REST AND ARM RESTRAINTS



Large headrest with padding

Adjustable height to accommodate drivers of various heights

Shoulder belts supported and retained with wire to keep on shoulders



Get seated in the race car and slide the arm restraint onto the arm placing it on the forearm just below the elbow.



APPENDIX I - MOUNTING BOCK USAGE

Acceptable Mounting Block Usage

- Bolts pass through the block, with nuts and safety wire on the back side
- Bolts completely encircle both sides of the frame
- Note: top block is cut thinner than is desirable



Not Acceptable Mounting Block Usage

- Bolts do not pass completely through the block; no nuts or wire/pins



Not Acceptable Mounting Block Usage

- Not acceptable for safety cage attachment because the clamp doesn't completely surround the frame with bolts on both sides
- Acceptable for mounting of other components provided the bolt passes through and has a nut and pin or wire (not shown).



APPENDIX J - HELMET AND RACING SUIT CERTIFICATIONS

What are the differences between the SA, M and K standards?

SA Standard was designed for auto racing while M Standard was for motorcycling and other motorsports. There are three major differences between them:

1. SA standard requires flammability test while the M standard does not.
2. SA standard allows narrower visual field than M standard (Some SA helmets may not be street legal).
3. SA standard has roll bar impact test while M standard does not.


The K standards are very similar to the SA standards; however the K standards omit the requirements for flame retardancy.



Where is the Snell label located?

There are two forms of the Snell serialized label. The most common is the adhesive label, but there is also a cloth type for the M, SA and RS standards. The adhesive label, or decal is usually affixed somewhere on the inside of the helmet. If it is not readily visible, check underneath the flaps of the comfort padding. The cloth type labels a generally sewn onto the chin strap and folded over. If a thorough search fails to turn up a decal then your helmet is not part of the Snell certification program and does not have the confidence of the Foundation.

Racing Suit Certification Labels

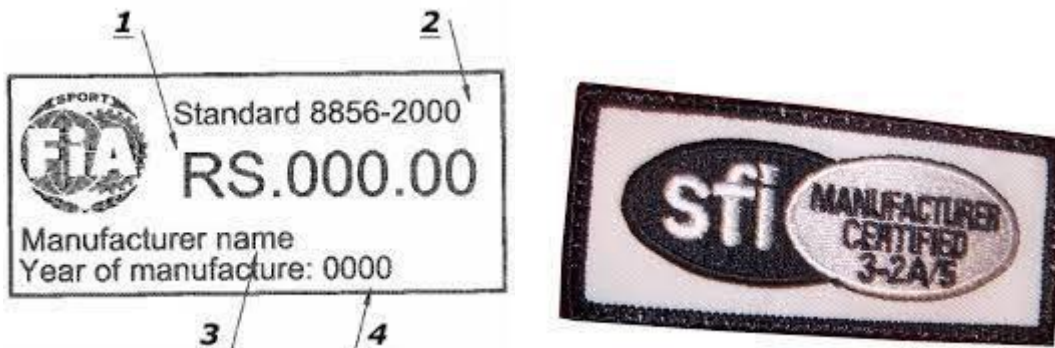



APPENDIX K - WKA ENGINE SPECIFICATIONS

600 2-CYCLE ENGINE SPECS / TECH

601 YAMAHA KT-100S

NOTE: This section covers stock Yamaha KT-100S engines under 6.23 cubic inches (102.11cc) maximum displacement. Engines must be single-cylinder and utilize single, stock carburetor. Unless otherwise specified, all parts are to be of original manufacture and be stock in appearance.

601.1 EXTERNAL MODIFICATIONS:

External modifications which do not in any way effect a performance gain are permissible, i.e. painting of head fins for advertisement, fin dampeners, cutting hole in ignition cover for installation of a starter nut. No Anodizing of any parts allowed unless otherwise noted.

601.1.1

NOTE: Depending upon specific class requirements, the following items may be considered open: air cleaner, clutch, muffler, rock guard, chain guard, motor mount, starter nut, external extension of carburetor jet needles, carburetor return springs, temperature gauge, tachometer, main bearing shims and external third-bearing, gaskets, oil seals, and fasteners. Bearings are a non-tech item but must be of same width and outside diameter as stock production components.

601.2 CRANKCASE:

Pulse hole may be relocated to front of engine for use with reversed cylinder. Hole not in use must be plugged. Internal diameter of pulse pipe may not exceed 0.128" NO-GO.

601.3 BOLTS:


Non-tech item unless otherwise stated.

601.4 BORE/STROKE:

Maximum bore diameter, 2.090"; maximum stroke, 1.816". See Section 503 for measuring procedures.

601.5 WALBRO WB3A CARBURETOR:

(JR. and SR. classes) must be of original manufacture and stock appearing. Captive or non-captive diaphragms are legal. Shims under the inlet spring are allowed. Fuel can only pass through stock metering orifices. Any means taken to bypass fuel to the engine in any other manner is not acceptable, no matter how it is accomplished. Any components not specified herein must be stock appearing. Inlet spring is a non-tech item. Carburetor may be run in either position. Both screens must be intact, circuit plate and inlet needle. Any stock Walbro filter screen is allowed. Filtering devices to protect metering diaphragm allowed. No means of depressing diaphragm allowed. No machining of throttle shaft is allowed. Shaft may be sealed with O-ring. Funneling of brass inlet not allowed. The minimum length of the inlet tract measured from the carburetor-mounting surface to the face of piston is 2.600" minimum, 2.700" maximum (with carburetor base gasket removed). See Figure 601.5 for specifications. Dimension Number 8 on diagram 601.5 - The measurement is a 1.010" maximum straight bore area only. Throttle shaft removal may be necessary to telescope gauge in front of butterfly. Nowhere throughout the throttle bore can the measurement exceed 1.010". Minimum throttle shutter thickness is 0.030"

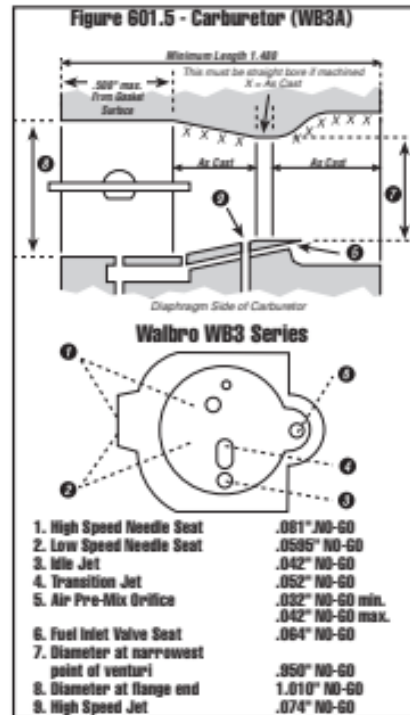

601.5.1 FUEL PUMP:

Fuel pump must be stock equipment with carburetor; either Teflon or rubber fuel pump diaphragm is allowed.

601.5.2 PHENOLIC SPACER:

Phenolic spacer must be OEM straight-bore, 1.000" minimum I.D., 1.050" maximum I.D., and maximum thickness of 0.406". New style black plastic spacer allowed.

601.5.3 ALUMINUM MOUNTING PLATE:

Aluminum carburetor mounting plate must be OEM straight-bore, 1.000" minimum I.D., 1.050" maximum I.D., and maximum thickness 0.485". Drilling of holes to rotate carburetor allowed. (Max. 2 sets of mounting holes allowed)

601.5.4 AIR FILTER/AIR-BOX ADAPTER:

Air filter/air box mounting adapter cannot be velocity stacked-shaped or act as a ram tube. (See Figure 551.2a for specifications)

601.5.5:

- 1 -- carb base gasket (gaskets) -- minimum thickness = 0.010" No-Go
- 2 -- throttle shaft minimum diameter = 0.212" No-Go shaft to be round
- 3 -- throttle shaft hole in carb body = 0.221" No-Go hole to be round

600




601.6 WALBRO WA55B SPORTSMAN CARBURETOR:

(Sportsman and Yamaha Cadet classes) Must be of original manufacture and stock appearing. Shims under the inlet spring are allowed. Fuel can only pass through stock metering orifices. Any means taken to bypass fuel to the engine in any other manner is not acceptable, no matter how it is accomplished. Any components not specified herein must be stock appearing. Inlet spring is a non-tech item. Carburetor may be run in either position. Both screens must be intact, circuit plate and inlet needle. Filtering devices to protect metering diaphragm allowed. Any stock Walbro filter screen is allowed. No means of depressing diaphragm allowed. No machining of throttle shaft is allowed. May be sealed with O-rings. Funneling of brass inlet not allowed. The minimum length of the inlet tract measured from the carburetor-mounting surface to the cylinder bore diameter 2.600" minimum, 2.700" maximum (with carburetor base gasket removed). High and Low needle seats Maximum of 0.037". High and Low speed extended metering screws allowed. NO auxiliary carburetor tuners allowed. Minimum throttle shutter thickness is 0.030". (See Figure 601.6 for specifications.)


- 1-- carb base gasket (gaskets) -- minimum thickness = 0.010" NO-GO
- 2-- throttle shaft minimum diameter = 0.181" NO-GO - shaft to be round
- 3-- throttle shaft hole in carb body = 0.180" NO-GO - hole to be round

609

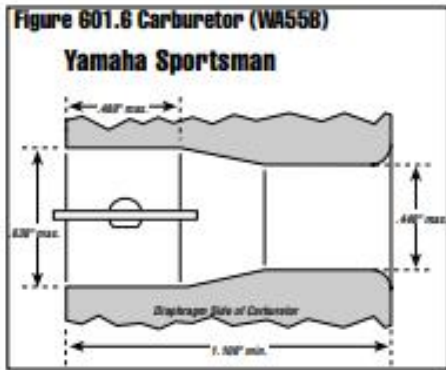

601.7 WALBRO WA55B MANIFOLD:

Manifold must be constructed of aluminum and machined in such a manner to prevent any type of air leaks. Air may only pass through carburetor. No leakage allowed. Manifold bolts directly to Phenolic spacer; replaces factory aluminum carburetor mount. Carburetor air box adapter cannot be velocity stacked-shaped or act as a ram tube. LD. of air box adapter is 0.750" minimum. WA manifold may be anodized. (See 601.7 for specifications.)

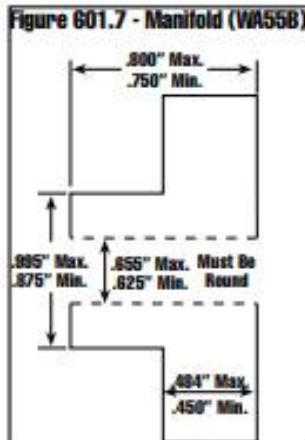

601.8 CYLINDER HEAD:

Any matching of the cylinder head or cylinder liner to accept a sealing device is not allowed unless it is stock equipment on the KT-100S engine. Cylinder recess must be only locating method for head gasket. Cylinder head gasket surface may not be stepped to center or locate head gasket, flat surface area only at gasket surface (no protrusion of any part of head through gasket). The combustion chamber volume shall be a Minimum of 11 cubic centimeters and spherical in shape. (See Section 504 for cc'ing procedures) All Cylinder heads must have OEM "Yamaha" casting into underside area. The spark plug hole, combustion chamber and squish band must be concentric to the head bolt circle within 0.020" (See Figure 601.8.) The stud holes in the cylinder head may be no larger than 0.365" and the cylinder head studs may be no smaller than 0.300".




601.8.1 HEAD GASKET:

Head gasket shall be copper or aluminum and stock appearing. Maximum outside diameter is 2.580". Must be OEM or exact copy in all dimensions except thickness.

601.9 EXHAUST, INTAKE AND TRANSFER PORTS:

ALL ports are to be in "as cast" condition, "except" Aluminum only may be blended in the inlet track behind carburetor and exhaust outlet areas only. The original design of the intake and exhaust port must be maintained. Surface finish is non-tech item in these two areas only. Port edges may not be chamfered. (See Figure 601.9 for port dimensions.)

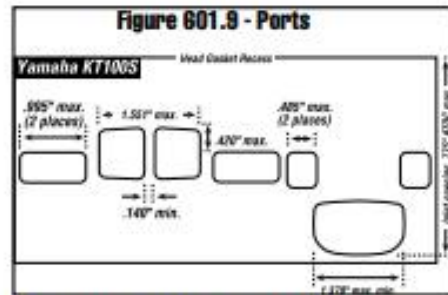

BLOW-DOWN CHECKING PROCEDURE FOR YAMAHA ENGINES --- (601.9 AND FIGURE 606.2)

- 1 -- By a careful visual inspection (light check) , identify the highest exhaust port and the highest intake port.
- 2 -- Using the Lad tool, zero the dial indicator on the highest exhaust port, taking care to hold the shaft of the tool against the cylinder wall.
- 3 -- roll the crankshaft backwards five turns (.500" on the dial indicator)
- 4 -- insert the Lad tool into the highest intake port, holding the shaft of the tool against the cylinder wall.
- 5 -- roll the crankshaft forward until the piston stops on the Lad tool and note the value.
- 6 -- the value must be between .390" and .420" to be considered legal
- 7 -- engine to be checked as raced



IT IS "NOT" PERMISSIBLE TO:

601.9.1

Alter by any method the aluminum to change the roof angle of the transfer ports.

601.9.2

Alter by any method the cast-iron to change port height, width or angle of transfer, intake or exhaust ports.

601.9.3

Alter by any method to change the shape or size of the passages from the cylinder base to the port.

601.9.4

Alter by any method to match the cases to the port passages (when cylinder is or is not reversed).

601.9.5

Sandblast, glass-bead, peen, etc., port areas.

601.9.6

Cast iron may show minor grinding nicks only. The cast iron in the lower transfer opening may have a minor chamfer from the factory. Minor damage to the transfer ports caused by foreign objects passing through the engine (i.e. broken cir-clip, carb screw, etc.) is not illegal.

NOTE: Due to manufacturing procedures, it is possible that some engines may have slightly "broken" port edges. When this exists, it is uniform on all port edges (top, bottom and sides) of all ports in the cylinder. The intersection of the port edges and the cylinder wall must still be within tech measurement specifications. As the bore size increases, the amount of "break" diminishes. If the cylinder bore size is 2.065" or larger, no "broken" edges are permitted. Minor damage to the transfer ports caused by foreign objects passing through the engine (i.e. broken circlip, carb screw, etc.) is not illegal.

601.9.7 EXHAUST PORTS, NEW & OLD-STYLE CYLINDERS:

A boss is cast into each side of the new-style cylinder barrels between the bottom and first cooling fin, approximately in the middle of the cylinder. One boss will have 787 designation cast into this area and opposite boss will have Y3 or Y4 designation cast into it. This identifies cylinder as "new" style.

601.9.7.1 NEW STYLE:

Cylinder tech procedure will be with dimensions appropriate for new-style cylinder. No grinding is allowed on the cast-iron portion of the new-style cylinders. Any means taken to remove or alter identifying boss will result in that cylinder being teched as a new-style cylinder.

601.9.7.2 OLD STYLE:

Cylinder tech will be done utilizing listed port data and requirements noted in 601.9 through 601.9.7 above, with the exception that 1 exhaust port may have the cast iron ground to bring exhaust measurements closer to specification. The remaining (other) exhaust port must be unaltered, as-cast finish on cast iron portion.

NOTE: When a cylinder has been thus ground, it is required that the aluminum surface on top of the cylinder next to the stud located above the port altered be MARKED. An arrow or an "x" is an acceptable mark. The altered port must be ground a minimum of 90° to the cylinder wall. No chamfer is allowed. NO free porting of exhaust ports is allowed. OLD STYLE CYLINDERS ARE LEGAL IN OPEN PIPE CLASSES ONLY.

601.9.8 EXHAUST PORT HEIGHT:

Exhaust port height is a max. Dimension of 1.155" ATDC or a min. of 1.155" BTDC. See Section 506 for measuring procedures.

601.9.9 INTAKE PORT HEIGHT:

Intake port height is a max. Dimension of 0.775" ATDC or a min. of 0.775" BTDC. See Section 505 for measuring procedures.

601.10 IGNITION ROTOR/TIMING:

NOTE: Ignition Timing is the primary ignition inspection and inspection "must" take place before rotor nut has been broken loose from crankshaft. See 601.11 for procedure.


Ignition must be of original manufacture and stock appearing. Right-hand rotor has machined side out; left-hand rotor has cast-side out. Rotor minimum diameter is 2.350", minimum width .817" boss area (3-bosses) minimum thickness .960", and minimum length .750" with two threaded holes to accept puller. Acceptable Yamaha Part Nos. is 7F6-85551-00, 7F6-85551-50, 7F6-85551-01, 7F6-85551-51, and 7F6-85510-03-00. The PRD T.C.I. ignition unit is approved for the KT100S (Metal case is stamped with the letters PRD). Inserts may be used to repair ignition-mounting holes; inserts must maintain the original centerline. External coil damage may be repaired with silicone or epoxy. Ignition bearing may be removed. Key is required, but is a non-tech item. See Figure 601.10



601.11 IGNITION TIMING:

NOTE: Inspection "must" take place before rotor nut has been broken loose from crankshaft.

The leading edge of the ignition rotor's magnet must line up with the trailing edge of the ignition coil's leg when the piston is at T.D.C. to 0.015" B.T.D.C. Max. On clockwise ignitions, the coil's trailing is the bottom leg. See Figure 601.11

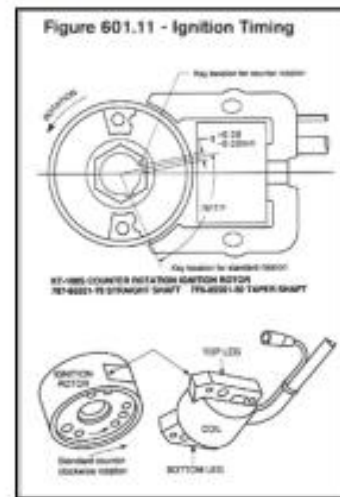

601.12 PISTON, PIN & RINGS:


Piston must be stock and approved single ring design with manufacturer's name cast or forged inside. Acceptable pistons are Yamaha, Burris, Wiseco, Vinar and KSI. Bottom of piston may be machined for adjustment of port timing but must be flat. Top of piston may not be modified in any way. No scalloping of transfer or exhaust area, top must be dome shaped, bottom of piston must be flat and 90 degrees to sides, maximum corner break top and inside and outside of bottom only, 0.030". If bottom of piston is machined, both sides must be equal distance front and back, ± 0.015". No external piston coating will be allowed above the ring land area of the piston. Exception: OEM Yamaha piston is approved with stock external coating above the ring land. See Figure 601.12. Ring must be of ferrous material. Wrist pin may not be tapered. Minimum Wrist pin length 1.565", maximum outside diameter 0.552", minimum outside diameter 0.550", maximum inside diameter is 0.410". The newest YAMAHA piston models are marked with the digits "3", "4" or "5" cast inside the piston. All are three are legal. The "4" and "5" pistons lack the oil hole in the pin boss found in the "3". Drilling a single oil hole with deburred edge and up to 0.120" in diameter in the piston boss is permitted.

600



| PISTON BRAND | A | B | C |
|--------------|--------|--------|--------|
| Burnis | 0.633" | 0.533" | 0.760" |
| KSI | 0.609" | 0.470" | 0.736" |
| RKE-787 | 0.635" | 0.489" | 0.758" |
| Vinart | 0.635" | 0.489" | 0.758" |
| Wiseco | 0.635" | 0.496" | 0.760" |
| Yamaha | 0.635" | 0.489" | 0.756" |

A- Top of piston pin to controlling edge of the piston
 B- Top of piston pin to top of ring groove
 C- Top of piston pin to top of piston
 All dimensions are + or - 0.010"
 Ring groove is 0.040"
 (See Figure 601.12 Piston & Pin)

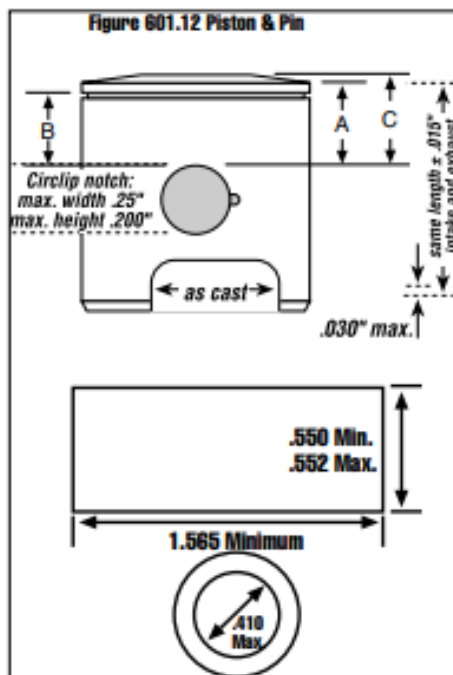


609

601.13 CONNECTING ROD:

Rod must be of original manufacture and stock appearing. Shot peening is allowed. Maximum rod length, center to center: 3.932 to 3.942". No grinding or polishing allowed. Approved rods are Yamaha part # 7F6-11651-01, 50W-11651-00 and 7F6-11651-02. Bottom-located rod is now approved. If connecting rod is located at the top, the top of the rod shall have two or more spacers with loose or caged bearings. Spacer material may be brass, steel or aluminum. The bottom of the rod shall have a solid bearing and no spacers. If bottom location is used, connecting rod must utilize a lower solid bearing and two spacers (one each side). Top of rod may use a cage bearing or loose needles. If loose needles utilized, thrust washers are permitted. The use of 2 styles of crank-pins is allowed. (a) Original stepped and plugged crank pin must have a minimum inside diameter of 0.400" after removal of steel plug. If this type of pin is utilized, plugs must be in place. Steel plugs must be drill-able and removable in tech inspection and removal is the responsibility of the competitor. (b) New style, non-stepped crank pin is with no plugs allowed. Maximum inside diameter is 0.425", minimum inside diameter is 0.390". See Figure 601.14

601.14 CRANKSHAFT:

Crankshaft assembly must be of original manufacture and stock appearing. Shot peening and polishing are allowed. Outside diameter measurement is 3.410" minimum, 3.435" maximum. Concentric bushings may be added to crankshaft journals to repair worn crankshafts. Inside diameter of bearings used with repaired crankshaft is not subject to tech. Additional removal of material in bearing recess area for proper bearing clearance is allowed. This shall be for clearance purposes only and not for lightening or balancing purposes. See Figure 601.14

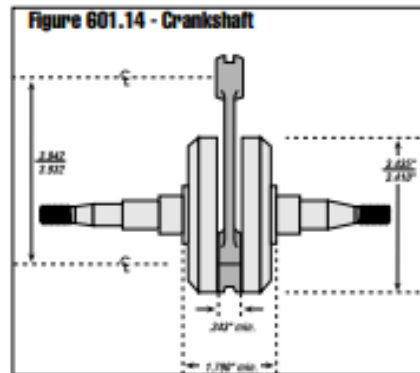

601.15 PIPE/MUFFLER:

See class structures in Sections 214, 312, 362 and 413 for requirements for specific classes. (See Sections 552 through 554 for specifications)

603 KOMET PISTON VALVE

NOTE: This section covers stock Komet Piston Valve 100cc engines (previously titled HPV). Engines must be single-cylinder, under 6.23 cubic inches (1012.11cc) maximum displacement and utilize single, stock carburetor specified for this class. Unless otherwise specified, all parts are to be of original manufacture and be stock in appearance. The Komet Piston Valve is the only approved engine. NO INTERCHANGE OF K71 PARTS ALLOWED.

603.1 EXTERNAL MODIFICATIONS:

No External modifications allowed (including clutch guard). Painting of head fins for advertisement is allowed. No anodizing of any parts allowed.

NOTE: Unless otherwise specified, non-tech items include gaskets, oil seals, bearings, bearing cages and fasteners. Bearings are a non-tech item but must be of same width and outside diameter as original parts.

603.2 PULSE HOLE:

Crank Case Pulse Hole opening for Komet Piston Valve Junior and Senior engines is 0.128" No-Go; for Komet Piston Valve Sportsman engines, the hole size is 0.085" No-Go.

603.3 BORE/STROKE:

Maximum bore diameter is 2.090" and a maximum stroke of 1.816". See Section 503 for measuring procedures.



APPENDIX L - POST RACE TECHNICAL INSPECTION LIST

| Purdue Grand Prix Post Race Inspection | | | |
|--|---|-------------------------|----------------------|
| Date: _____ | | | Kart #: _____ |
| Position: _____ | Team: _____ | Inspector: _____ | |
| | | | Initials |
| Total Weight | (Kart, Driver, and Gear) ≥ 360 pounds | | |
| Rear Axle Width | ≤ 55 1/8 inches | | |
| Fuel Capacity ≤ 7 quarts | Cyclohexane | | |
| Silencer | Induction silencer (CIK two-hole design, no additional holes except for tether) | | |
| | Baffle tube length ≥ 3.732 inches | | |
| | Baffle tube diameter ≤ 0.905 inches | | |
| Exhaust Pipe | Diameter ≤ 1.750 inches | | |
| | Silencing can diameter ≥ 3.5 inches | | |
| | Exhaust gas outlet ≤ 0.7854 square inches (must be in rear half of can) | | |
| Walbro WB3A Carburetor | Only stock Walbro #WB3A carburetors are allowed | | |
| Yamaha KT100 Two-Cycle Engine | Combustion chamber volume ≥ 11 cubic centimeter | | |
| | Cylinder bore ≤ 2.090 inches | | |
| | Cylinder stroke ≤ 1.816 inches | | |
| | Inlet tract length = 2.600 ~ 2.800 inches | | |
| | Intake port height ≤ 0.775 inches | | |
| | Exhaust port height ≥ 1.155 inches | | |
| | Ignition module must be stock, unaltered Yamaha, PRD, or Atom | | |
| | Piston must be Yamaha, Burriss, Wiseco, Vinart, or KSI RKE-787 (domed) | | |
| No coating above ring, single ring except Burriss double ring | | | |
| Engine complies with 2023 WKA engine specifications | | | |
| | Name | Signature | Date |
| Lead Technical Inspector: | | | |
| Crew Chief: | | | |
| Driver: | | | |
| Race Director: | | | |
| Race Director: | | | |
| Additional measurements may be required to determine the stock characteristics of any engine, at the discretion of the Race Director(s) and Lead Technical Inspector. | | | |



APPENDIX M - SPRINT RACE QUALIFICATION ORDER

| Position | Sprint 1 | Sprint 2 | Sprint 3 |
|----------|----------|----------|----------|
| 1 | 28 | 29 | 30 |
| 2 | 31 | 32 | 33 |
| 3 | 34 | 35 | 36 |
| 4 | 37 | 38 | 39 |
| 5 | 40 | 41 | 42 |
| 6 | 43 | 44 | 45 |
| 7 | 46 | 47 | 48 |
| 8 | 49 | 50 | 51 |
| 9 | 52 | 53 | 54 |
| 10 | 55 | 56 | 57 |
| 11 | 58 | 59 | 60 |
| 12 | 61 | 62 | 63 |
| 13 | 64 | 65 | 66 |
| 14 | 67 | 68 | 69 |
| 15 | 70 | 71 | 72 |
| 16 | 73 | 74 | 75 |
| 17 | 76 | 77 | 78 |
| 18 | 79 | 80 | 81 |
| 19 | 82 | 83 | 84 |
| 20 | 85 | 86 | 87 |
| 21 | 88 | 89 | 90 |




APPENDIX N - TRACK WORKER BEST PRACTICES - HOW TO BE A GOOD TRACK WORKER

- 1. Do not get run over!!**
 - Drivers have roll cages, helmets, and other protection; YOU DO NOT!
 - 2. Stay alert and pay attention at all times!!**
 - Do not turn your back to the oncoming traffic.
 - Always look both ways before crossing the track.
 - Do not stand in the danger zones on the outsides of turns.
 - No cell phones, cameras, or other electronics allowed.
 - 3. Push stalled karts off the track.**
 - Push stalled karts at least 10 feet into the grass.
 - Push karts into the infield if possible.
 - 4. Push running karts onto the track.**
 - Check both ways for oncoming traffic before pushing the kart onto the track.
 - The quicker you can get a running kart moving again, the less likely it is to stall and need to be pushed back to the pits.
 - 5. Do not let drivers get out while on the track.**
 - If the kart is locked up, drag it over (with the driver inside) onto the grass first. It is far too dangerous for drivers to climb out of the kart onto the track.
 - 6. Put straw bales and barriers back into place after accidents.**
 - After moving the kart off the track, you can usually fix the bales while the driver is getting out.
 - Move broken bales to the back of the row.
 - 7. Clear debris off the track.**
 - Small asphalt rocks are usually NOT a problem.
 - Small amounts of straw, grass, or dirt are usually NOT a problem.
 - The large rocks ARE a problem and should be swept or kicked off the track.
 - If parts come off a kart be careful picking them up because they could be very hot.
 - Show any significant parts to the nearest Race Official to address possible safety concerns.
 - 8. Move with a purpose.**
 - The quicker you get the track back to racing conditions the safer it will be for the drivers.
 - 9. Spread out as needed.**
 - Track workers should be evenly distributed at each corner.
 - Move to other corners as instructed by the race officials.
- Appendix Q shows at which corners on track the safety workers stand.
- 10. Help each other out.**
 - If there is a large crash in a nearby corner, don't just stand and watch, go and help clean up.
 - 11. If a kart will roll, ROLL IT, do not carry it.**
 - Drivers may complain, but we don't care. Just roll it, it's safer for everyone.
 - A broken kart is better than a broken track worker.
 - 12. Cross the track at Preferred Crossing Points.**
 - See map below.
 - When crossing the track to enter pit lane, coordinate with the official at turn 5 to cross when it is safe.
 - 13. Eye protection and safety vest with team number is required at all times.**
 - 14. Gloves are recommended.**




Crossing Locations for Track Workers Transporting Karts to the Pits

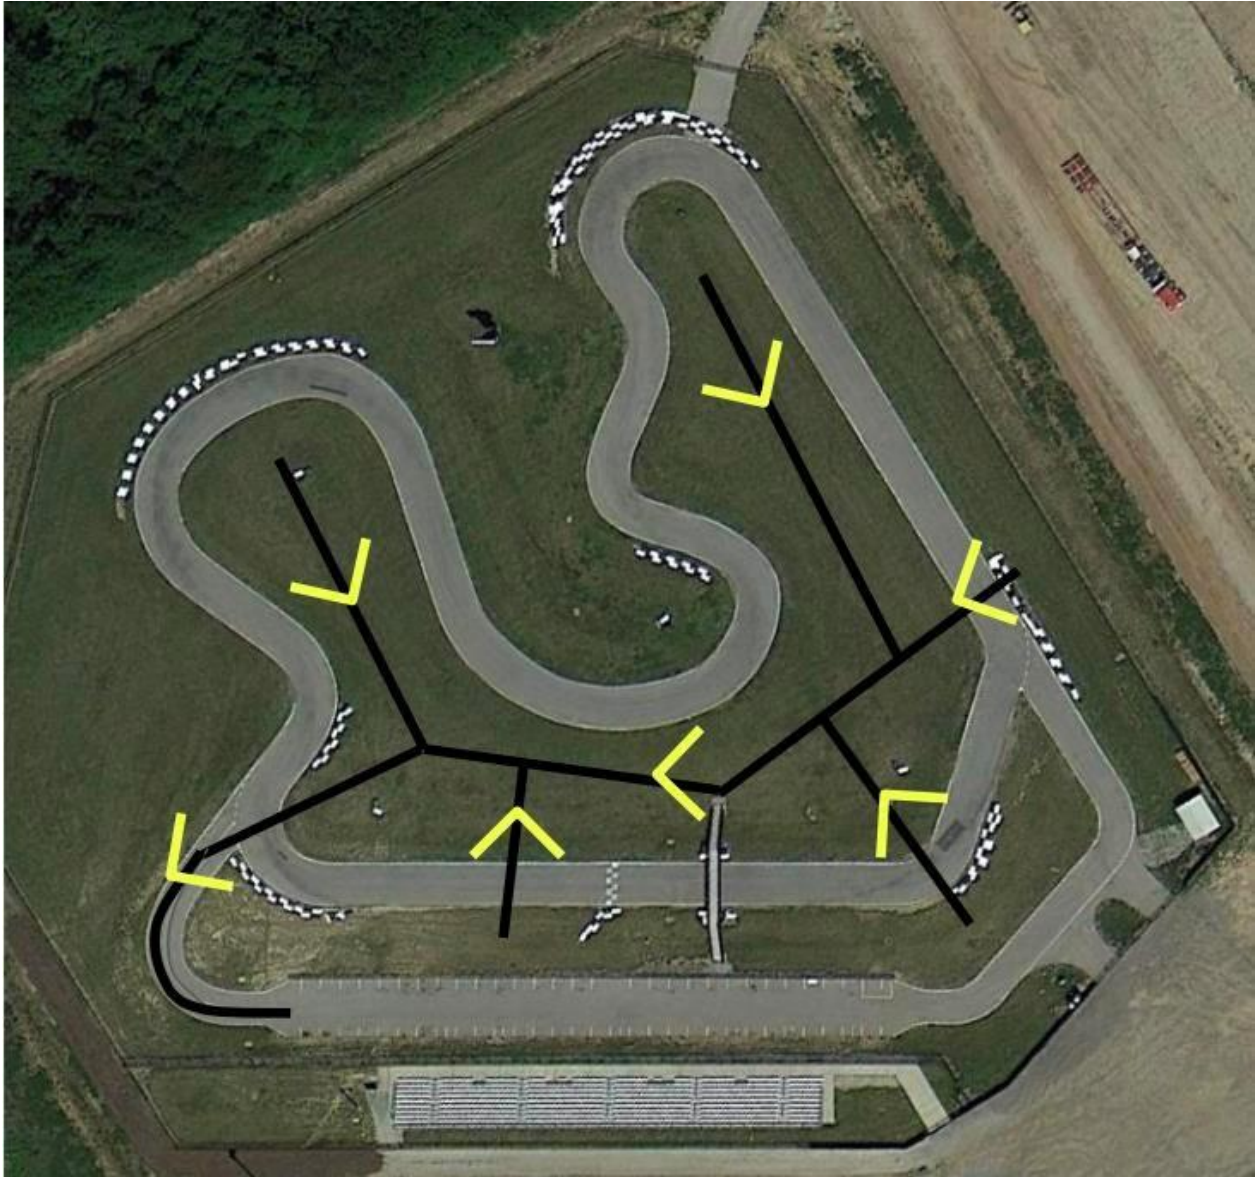



APPENDIX O - PIT SPOT ASSIGNMENTS BY QUALIFICATION ORDER

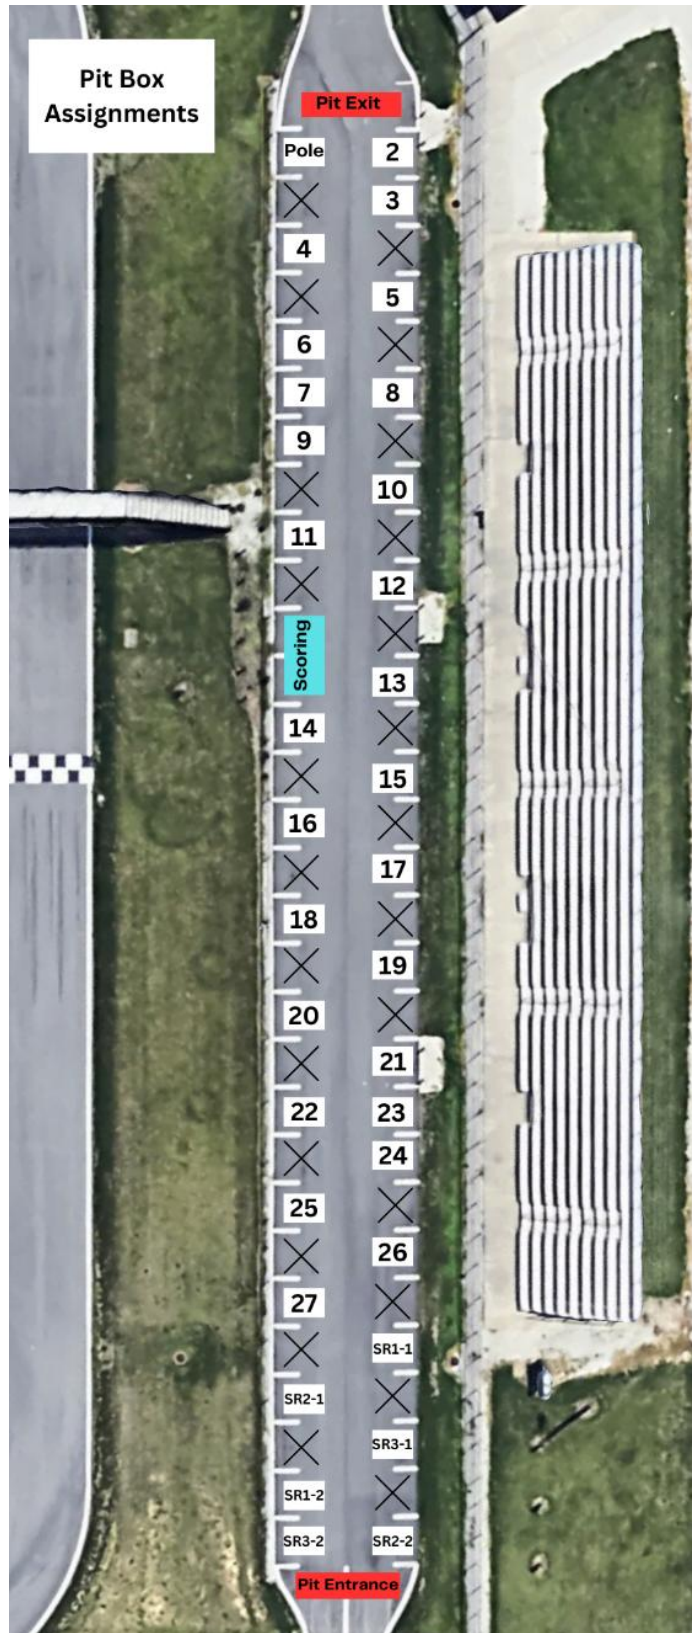



APPENDIX P - BOLT AND NUT SECUREMENT BEST PRACTICES

- Nut securement

- When safety wiring a bolt through the threads to secure a nut(s), it is best to place the safety wire as close to the tightened position of the nut(s).
- If the safety wire is placed further from the tightened position of the nut it will still secure the nut on the bolt, but the securement provided by the bolt and nut may be compromised.
- Some components on the kart may still be able to operate as normal if the nut has loosened, as long as the safety wire is securing it close to the tightened position.

- Bolt Securement

- When safety wiring a bolt, the safety wire must be secured so that the forces from the safety wire pull in the tightening direction.
- If the safety wire pulls in the loosening direction, the bolt may be loosened over time or when the safety wire is secured.
- If two or more bolts are safety wired together, the safety wire should pull in the tightening direction for all bolts.

Items shall be safety wired in such a configuration that the safety wire shall be put in tension when the parts tend to loosen.



Safety wire Bolt-Heads



Safety wire Castle Nuts



Appendix Q – Corner Numbers

- The official corner numbers used by the PGPF to communicate with teams about where a kart received a black flag, penalty, etc.
- Each number is the location of Race Officials on track and where safety workers will be dispersed to





INDEX

A

Advertisement Banner..... 10
 Advertising..... 10
 Air Tanks 50
 Appeal Form..... 58
 Appeals 29
 Approval Addendum 78
 Arm Restraints..... 49
 At Track Procedures 16

B

Batteries 42
 Belts..... 49
 Brakes 40
 Bumpers 35

C

Cameras 44
 Castellated Nuts..... 42
 Chain Guard..... 40
 Chain Oilers 40
 Clutches 40
 Competition Protest..... 28
 Composite Materials..... 34
 Cotter Pins 42
 Crew Changes 14
 Crew Chief 13
 Crew Member Clothing..... 47
 Crew Size 12

D

Driver Protective Clothing..... 47
 Driver Restraint Systems 48
 Driving Practices..... 51

E

Electronic Devices 44
 Eligibility 12
 Engine 45
 Entry Deadline..... 15
 Entry Fees 15
 Exhaust System 41

F

Fire Extinguishers..... 48
 Flags..... 16
 Floor Pan..... 37
 Frame Attachment..... 36
 Fuel and Oil..... 45

Fuel Lines 39
 Fuel Storage 46
 Fuel Tank..... 38
 Fuel Testing..... 46

G

Gearboxes..... 40
 Governing Bodies..... 5
 Ground Clearance 44

H

Hand Signals 52
 Harness Support..... 37
 Head Clearance..... 35, 60
 Headrest..... 37
 Helmets..... 47
 Hold Harmless Agreement..... 54

I

Impoundment 31
 Inspection Stickers 34

K

Kart Identification 43
 Kart Specifications..... 34
 Kart Width 37
 Kill Switch 42

M

Main Frame 34
 Material Specification 32
 Medical Insurance Form..... 54
 Mirrors 33, 50
 Mounting Blocks..... 36

N

Neck Brace..... 47
 Number Panel Requirements 43

P

Penalties..... 26
 Pit Passes..... 9
 Pit Procedures..... 20
 Pit Speed 21
 Pit Stop 21
 Plastic Items 33
 Post Race Technical Inspection..... 31, 70
 Practice Requirements 12



Protest Form 57
 Protests 28

Q

Qualification 23

R

Race Duration 11
 Rear Axle..... 41
 Refunds 15
 Registration Procedure..... 15
 Releases 7
 Relief Drivers 14
 Repositioning 27
 Roll Cage 34
 Roll Cage Attachment 36
 Rookie Drivers 14
 Rookie Practice..... 14

S

Safety Belts 48
 Safety Committee..... 6
 Safety Equipment 47
 Safety Frame 34
 Scoring Procedures..... 18
 Scoring Protest..... 28

Seat..... 37
 Spindle 41
 Sponsors 10
 Sprint Race 24
 Stalled Karts..... 52, 72
 Starters..... 42
 Steering 40

T

Tank Exchange..... 21
 Technical/Safety Protest 28
 Throttle 39
 Tires 37
 Track Worker 13
 Transponder 18

V

Variance Form 56

W

Weight 44
 Welds 41
 Wheelbase..... 36, 37
 Wheels 37



APPROVAL ADDENDUM

Signature of Approval:

Signed by:
Abbi Guse
7847AE82D968417...
Grand Prix President

Signed by:
Kegan Williams
F8CC5D737D894AD...
Grand Prix Internal Vice President

Signed by:
Declan Ryan Sears
1366F2F4A95D412...
Grand Prix Race Director

Signed by:
Aiden Platt
BBD0114B17F4492...
Grand Prix Race Director

DocuSigned by:
Paul McPherson
AF4F9911754847A...
Grand Prix Advisor

DocuSigned by:
Martia King
CEG281C0D263420...
Office of Student Activities and Organizations

DocuSigned by:
Mark Keibert
6A4B82BBC3A34EE...
Office of Risk Management